

This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + Refrain from automated querying Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at http://books.google.com/







HANDBOOK

())

WOOD PRESERVATION




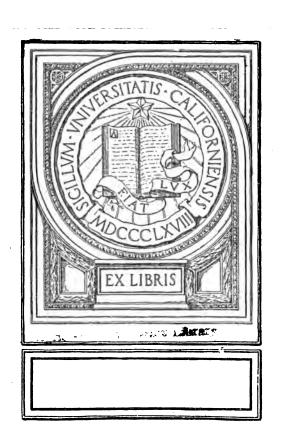



~

• •





Handbook

on

Wood Preservation




Wood preservation is wood perpetuation.

in. Calumba

American Wood-Preservers' Association 1916

Copyright, 1916 By American Wood-Preservers' Association.



FOREWORD.

Wood properly preserved is practically permanent wood, and because efficient avoids the cost of unnecessary replacements. The treatment of timber to make it last the limit of its serviceability is a fundamental feature of modern engineering. Briefly, in the following pages, the American Wood-Preservers' Association presents facts and figures for those becoming interested in the subject. Further information will be cheerfully given by any of its members or officers (see pages 47-55). Reference to the literature listed on pages 56-73 also is recommended. The most comprehensive publications on the subject are the Proceedings of the American Wood-Preservers' Association and Howard F. Weiss' "Preservation of Structural Timber." For the guidance of treating-plant operators, construction engineers, and others interested in the technique of wood preservation, the American Wood-Preservers' Association will soon issue the beginnings of a Manual of Recommended Practice.

By up-to-date methods and in conformity with the best practice wood can be so preserved that its life is prolonged to at least three times what it would be without treatment. Consumers of wood can figure the savings for their own particular service, after getting quotations from their nearest wood-preserving plant. Large users of treated wood estimate savings as follows: Ties, 2 to 10 cents per tie per year; piles, 20 to 100 cents per pile per year; poles, 5 to 15 cents per pole, per year; posts, 1 to 3 cents per post per year; mine timbers, 2 to 3 dollars per gangway set per year.


448940

CONTENTS.

Decem Durana dia and Maria	Page
Decay, Preparation and Treatment of Wood:	
Origin of Decay Kinds of Decay Conditions Favorable to Fungous Growth. Woods that Resist Decay Kinds of Wood that Need Treatment. Consumption of Treatable Woods. Seasoning Wood Before Treatment. Quantities of Preservatives Injected into Wood.	1 1 1 1 1 2 2 3
Chronicle of Wood Preservation:	
Egyptian Embalming Fluid. Greek Art Roman Antiseptic Oils British Preserving Warship Timbers. Dutch Preserving Marine Structures. Famous Oil Well in Burmah. Beginning of Scientific Wood Preservation. Patents First Cross-Ties Treated in United States. First Commercial Wood-Preserving Plant in United States. Processes and Methods of Wood Preservation.	4 4 4 4 4 4 4-12
Progress in Wood Preservation:	
Founding of Wood-Preserving Industry in United States Factors in Growth of Wood Preservation in United States Plants in Operation in United States Classes of Material Treated in United States	13
Processes for Preserving Wood:	
Non-Pressure Processes. Pressure Processes. Brush Treatment. Dipping or Steeping Treatments Treating Cylinders Full-Cell Treatments. Empty-Cell Treatments Bethell Process Boiling Process. Boulton Process. Burnett Process. Card Process. Lowry Process. Rueping Process. Steaming Process.	22 22 22 22 23 23 23 24 24 24 25 25 25 26

CONTENTS

Wood Preservatives:
Page
Substances Proposed for Protecting Wood Against Decay 27
Merits of a Preservative
Economic Value of Various Preservatives 27 Preservatives Used in United States 27
Creosote as a Preservative
Specifications for Creosote
Zinc Chloride as a Preservative
Specification for Zinc Chloride
Manufacturers of or Dealers in Wood Preservatives:
Creosote30, 31
Zinc Chloride
Patented Proprietary Preservatives
Uses of Preserved Wood:
Merits of Wood
Principal Uses of Treated Wood
Railway Ties and Timbers
Telegraph and Telephone Material
Paving and Flooring Material
Structural Timbers
Manufacturers of Wood-Preserving Equipment:
Retorts, Tanks, Etc
Users of Preserved Wood:
Railroads 30
Railroads
Mining Companies
Agriculturists 36
Shipbuilding Companies
U. S. Government
Municipalities
Wood-Preserving Plants:
_
United States
Canada
American Wood-Preservers' Association:
Constitution41-46
Officers and Committees
Members48-55
Bibliography of Wood Preservation:
Publications, Proceedings, Periodicals56-73





HANDBOOK on WOOD PRESERVATION.

DECAY, PREPARATION AND TREATMENT OF WOOD.

Recent research has shown that the decay of wood is due to the functions of low forms of plant life known as fungi, not to fermentation of sap or soil reaction. These fungi feed on certain substances in the wood and so dissolve the wood structure that it crumbles. Thus is produced punky or rotten wood. Evidence of the existence of a fungus is to be had in the form of a "bracket," "conk," "dog ear," "punk," "rabbit ear," "toadstool," etc., which projects from a surface of wood. These external growths are the fruiting bodies of the fungi and their functions are to produce spores, or seeds, which adhere to them until dislodged by the air or other disseminating mediums. Wherever these spores alight on wood and find conditions favorable, they germinate and develop into destructive agencies. In addition to spreading by means of spores or seeds, fungi extend themselves from one piece of wood to another by growing over small intervening spaces. Consequently decaying wood is a menace to all sound wood in the vicinity.

To develop, fungi require air, food, moisture and warmth. Dampness is the most favorable condition for them. Since the control of atmosphere, precipitation, and temperature are not practicable with wood used outdoors, the surest way to stop fungi is to poison their food supply by injecting into wood substances on which they cannot subsist.

The various woods available for use in the United States differ widely in their lasting quality, or ability to resist decay. While the sap portion of all woods will soon decay under exposure to the weather, the heartwoods of catalpa, cedar, chestnut, cypress, locust, some oaks, some pines, redwood, walnut, and a few other woods are durable.

The growing scarcity and high prices of woods which remain sound long dictates in many localities the use of woods not so durable. The greatest economy is to be effected by confining preservative treatment to woods which are not of themselves resistant to decay, because these often-otherwise-unserviceable woods are obtainable at comparatively-low cost. How helpful preservatives are in enlarging the

HANDBOOK ON WOOD PRESERVATION

number of usable woods may be seen in the following lists of kinds which without treatment could not render satisfactory service:

Pos	ts	Ties		
Ash Basswood Beech Birch Butternut Cottonwood Elm	Gum Hickory Maple Oak (Red) Pine (Sap) Poplar Sycamore Willow	Ash Beech Birch Elm Gum	Hickory Maple Oak (Red) Pine (Sap) Sycamore	

The consumption of treatable woods as cross-ties is to be seen in the following figures for 1915:

Oaks, 16,885,517; southern pine, 8,541,203; Douglas fir, 3,553,854; western pine, 2,007,609; beech, 2,933,737; gum, 277,886; tamarack, 932,038; maple, 36,942; birch, 173,971; elm, 50,846; other species, 1,691,982; a total of 37,085,585 cross-ties.

The proper preparation of wood for treatment is essential to its successful preservation. Green wood resists the penetration of preservatives. The moisture which is in freshly fallen trees must be reduced in volume or consistency before it can be replaced by a preservative. This is accomplished by exposing the wood to the open air, by applying to it hot air in a kiln or steam in a closed cylinder, or by boiling it in hot oil. The method depends on the kind and the condition of the wood to be treated. But with any method for any kind of wood, the first step in its preparation for treatment is the removal of all bark.

Most woods can be prepared for treatment by being stacked on well-drained ground free from vegetation, in open piles for 4 to 12 months. In arid regions the piles should be less open than in humid regions, to avoid severe checking. Where wood splits while seasoning, irons of appropriate shape to stop the evil should be driven into the ends of the timber. Wood which is to dry in the open is preferably cut during winter, as spring and summer are the better seasoning periods.

The length of open-air preparation necessary or possible depends on the kind of wood, its dimensions, and the latitude of its storage. Oak may require 12 months seasoning in the vicinity of Philadelphia, while eight months may be enough around New Orleans. It might safely be held one and one-half times as long in either place. Gum, however, could and should be treated within eight months in the North and within four months in the South. The greater the surface area of a piece of wood in comparison to the volume, the more quickly will it dry. Most treated cross-ties are air-dried.

When open-air preparation is not feasible, steaming is usually resorted to. Care must be exercised that the pressure and its period are not carried to where the structure of the wood is injured. A vacuum is applied to dry the wood after its saturation by the steam. Most treated piles and structural timbers are prepared for treatment by steam.

On the Pacific Coast neither open-air nor steaming preparation is practiced. There the wood being treated is boiled in the creosote with which it is preserved.

After wood has been brought to a condition in which it can be treated it may be preserved by any of the processes referred to on pages 22-26.

The degree of treatment to be given varies with the kind and character of the wood and the service expected of it. In all cases the sapwood of treated material should be thoroughly penetrated by the preservative. The quantities of preservative usually left in timbers for various uses are as follows:

Material Treated	Pounds Per Cubic Foot.				
material Treated	Creosote	Zinc Chloride			
PILES: Salt Water	16 24				
Fresh Water	12 — 16 8 — 12				
Ground BLOCKS:	8 — 12				
Paving	16 20				
Flooring	6 — 12	14 1/2			
TIES TIMBER	5 — 12	1½ — ¾			

PRESERVATIVES INJECTED INTO WOOD.

Since preservative treatment will not remedy structural defects of any kind, wood which is not free from decay or which has knots, splits, or other faults of sufficient size or number to weaken it for its purpose should not be treated.

Timber which has to be bored, dapped, mortised, or otherwise cut into during its erection should be so framed before treatment.

Preservation insures wood against deterioration.

CHRONICLE OF WOOD PRESERVATION.

The ancients were skilled in the art of preserving organic bodies. Pliny has said that they used garlic boiled in vinegar for protecting timber from attacks by worms. The early Egyptians embalmed their dead with oil of cedar, and later tar and linseed oil were recommended as preservatives. The Greeks and Romans recognized the antiseptic value of essential oils for preserving the wood they used in buildings. They also charred the wood to prevent decay. The Britons used to preserve the timbers of their warships against decay, either by soaking or coating them with petroleum oil, linseed oil, etc., and for a long time it was the practice to rub oil into the wood, or pour the oil into holes that had been bored into the wood. The Dutch early learned the advantage of preserving the timbers used in the construction of their dykes and marine structures by coating them with oil. The famous petroleum wells near Prome, in Burmah, furnished a good preservative for protecting wood used in ships and dwellings. But it was not until the early part of the nineteenth century that the preservation of wood by the injection of chemicals became scientific in principle and developed rapidly.

Numerous patents covering methods of preserving wood have been issued both in this country and abroad, and the early processes employing either animal oils, mineral oils or vegetable oils have been steadily improved. The mechanical operating features of these processes also have been improved, and the aim of the twentieth century wood-preserving plant is to afford wood as much protection against destruction as is possible, with as little preservative as will assure efficiency.

The growth of wood preservation in the United States from 1838, when the first cross-ties were treated by an infusion of bichloride of mercury and laid on the Northern Central Railroad in Maryland, now part of the Pennsylvania System, has been extraordinary.

The first commercial wood-preserving plant in the United States was built at Lowell, Mass., in 1848, using alternately bichloride of mercury and chloride of zinc, and it is still in operation.

The following chronological record of the wood-preserving industry begins in 1657, prior to which time authentic information is not available:

- 1 1657. Glauber experimented with vegetable pyroligneous acid (obtained by distillation of wood), first carbonizing the wood by fire, then covering it with tar and immersing the wood in the acid.
 - 1705. Homberg used mercuric chloride for preserving wood.
- ~1737. First American colonial privilege granted for preserving timber. Emerson patented a process for saturating timber with boiled oil mixed with poisonous substances.
- \ 1740. Reid proposed a method of using a vegetable acid (probably pyroligneous acid) as a bath for wood to protect it against decay.

- 1756. Hales recommended use of linseed oil for soaking planks at the water-line of ships to prevent decay.
- 1767. De Boissieu used mercuric chloride as a preservative. He and Bordenave recommended copper sulphate, the process being known as "Margaryizing."
- 1798. Volmeister washed and immersed wood in a solution of sea water.
 - 1806. Perkins filled the interstices of wood with dry salt.
- 1809. First French patents on timber preservation granted as a result of the patent law created by Napoleon I. .
- 1811. Lukin treated wood by burying it in pulverized charcoal in a heated oven.
- \ 1815. Wade recommended zinc chloride. Finding that alum was not a good preservative and rapidly decayed timber he suggested impregnation with resinous or oleaginous substances (especially linseed oil), or with common resin dissolved in a tank of caustic alkali, and subsequently plunged the wood into water acidulated with any cheap acid or with alum in solution. ☐ Bowden immersed wood in sea water. Boydon, of the British Navy Office, advocated boiling in lime water timber blocks and tree nails of ships, followed by boiling in a thin sclution of glue, by means of which the pores of the wood would be filled by a hard substance insoluble in water. Boydon also thought that glue might be used with lime water, or glue and lime water mixed together, to check the growth of vegetation and strengthen wood.
- ~ 1817. Chapman used copper sulphate, and experimented with lime, soap and alkaline salts.
- 1820. Pasley first boiled wood in water, and applied acids and other concentrated liquids.
 - 1821. Knowles and Davy immersed wood in mercuric chloride.
- 1822. Prechtl exposed wood to the vapor of water alone and then to a mixture of water and tar.
- 1823. Oxford coated wood with oil of tar, previously treated with gaseous chlorine.
- 1824. Cox saturated wood with a mixture of fish oil, rosin and sulphur.
 - 1825. Langton extracted by a vacuum the air from heated wood.
- 1826. Newmarch boiled wood in a mixture of linseed oil, iron sulphate, verdigris, arsenic and alum.
- 1828. Gossier alternately immersed wood in saline solutions containing calcium chloride, Glauber salts, iron sulphate and sodium arsenate.
- 1829. Carey first perforated wood and then introduced a mixture of salt, powdered charcoal and animal or vegetable oil.

- 1831. Breant invented an apparatus for forcing preservative liquids into wood.
- 1832. Kyan patented the injection into wood by pressure in a closed cylinder of mercuric chloride. Oxford patented the coating of timber with lead oxide, calcium carbonate and carbon of purified coaltar, ground and mixed with oil. In this year was also tried smoking green wood to create a protective coating against decay.
- 1833. Attempts to arrest decay in wood by immersing or coating it with tar and tobacco leaves; also coating with rosin dissolved in fish oil, and coating with india rubber dissolved in fatty oils.
- 1834. Strutzke and the Society of Arts of London introduced the method of repeatedly coating wood with a solution of iron sulphate.
- 1835. Monteith immersed wood in lime water. Concentrated sulphuric acid as a coating to carbonize wood was also tried by an investigator. First wood pavements for city streets in the United States were laid in New York.
- 1836. Moll patented process for treating wood with coal-tar creosote in a closed iron vessel. Chevalier coated wood with a solution of tar and tobacco leaves.
- 1837. Boucherie recommended the use of zinc chloride. Margary's patent granted for using copper sulphate. Flockton saturated wood with oil of tar and iron acetate. Letellier immersed wood in a solution of mercuric chloride, and when dry subjected it to a coat of glue. Granville used the refuse water of salt works to preserve wood. Gottheil immersed wood in resinous solutions containing tar, oil of turpentine, and salt. The Industrial Society of Annaberg, Germany, introduced the method of immersing wood for a month in soluble glass, then placing it in water acidulated with hydrochloride acid, washing and drying, and finally rubbing it with oil.
- 1838. Bethell patented process for using coal-tar creosote, injected into wood under pressure in a cylinder. This process is still in use. Burnett patented the use of zinc chloride. Chestnut cross-ties, treated by the Kyan process, laid on the Northern Central Railroad of Maryland.
- > 1839. Boucherie patented the absorption by the tree while alive or immediately after cutting, of iron acetate, acetic acid, muriate of lime, copper sulphate, mercuric chloride and other chemicals. Kyanized hemlock cross-ties laid at the fortifications at Fort Ontario, New York.
- 1840. Feiselli, after steaming the wood, injected a solution of alum and potash, or soluble glass and dilute sulphuric acid. Munzing immersed wood in a solution of muriate or protoxide of manganese, the refuse liquid of chlorine works. Pine stringers, subjected to a lime bath, laid on Philadelphia & Columbia Railroad. Kyanized oak ties laid on the Chesapeake & Ohio Railroad, and bridge timber treated by the same process used at Alexandria, Va.

- 1841. Payne patented the treatment of wood first with a solution of muriate of lime, iron sulphate and potash, and then with alum and potash. Pons immersed wood in a solution of iron nitrate, saltpeter, alum, and potassium ferrocyanide.
- ➤ 1842. Timperly used mercuric chloride. Kyanized ties laid on Baltimore & Ohio Railroad.
- 1843. Parkes treated wood with caoutchouc dissolved in carburet of sulphur eupion. Earle immersed wood in a solution of iron sulphate or copper sulphate.
- 1844. Burkes first steamed the wood and then impregnated it with a solution of soluble glass and iron sulphate.
- 1845. Ransome, after removing the air from the wood, injected by pressure a solution of soluble glass, and later placed it in a diluted acid.
- 1846. The Eastern Massachusetts Railroad used the Kyan process. Blythe invented "thermo-carbolization," which consists in treating wood with carburetted steam to extract the sap and water, and at the same time inject into the wood creosote held in suspension. Payne, after extracting the air from wood, injected a solution of metallic sulphurets (lime and baryta), and finally an acid or metallic salt (iron sulphate, etc.). Venzat and Banner impregnated wood with a solution of sulphate or muriate of copper, and followed this with baryta.
- _ 1848. Wood preservation on a commercial scale began in the United States through building of a Kyanizing plant at Lowell, Mass., to treat timbers used in locks and canals on the Merrimac River. This plant is still in operation.
 - 1849. New York Central Railroad used Kyanized cross-ties.
- 1850. Kyanized pine bridge timber used by the Philadelphia & Reading Railroad. First Burnettizing plant in America built at Lowell, Mass., to treat canal timbers.
 - 1852. Philadelphia & Reading Railroad treated ties with tar.
 - 1853. Fitchburg Railroad used Kyanized shop floor joists.
- 1854. Kyanized pine used for the Blackstone bridge of the New York & New England Railroad. Creosoted ties laid on Philadelphia & Reading Railroad.
- 1855. Burnettized spruce stringers and ties laid on the Union (horse) Railroad of Cambridge, Mass.
- -1856. Vermont Central Railroad erected a Burnettizing plant for treating hemlock cross-ties and bridge timbers.
- 1857. Burnettized spruce used by the Middlesex & South Boston Railroad, and on the Boston, Mass., wharf.
- 1860. Chicago, Rock Island & Pacific Railroad treated bridge timber with zinc chloride. Burnettized spruce bridge ties used on the Boston & Albany Railroad in Boston, Mass.

1861. Erie Railroad built a Burnettizing plant at Oswego, New York, which was burned in 1869, and has not been rebuilt.

1862. Burnettized bridge timber used by the Ohio & Mississippi Railroad.

1863. Philadelphia, Wilmington & Baltimore Railroad built Burnettizing plants, at Wilmington, Delaware, and Perryville, Maryland, to preserve timbers used in wooden bridge at Havre de Grace, Md.

1865. Old Colony Railroad erected a Bethell plant at Somerset, Mass., which is believed to be the first practical use of this process in the United States. Foreman applied to wood a dry powder of salt, arsenic and corrosive sublimate. Isaac Hinckley, late President of the Philadelphia, Wilmington & Baltimore Railroad, used creosote to preserve piles for bridge over the Taunton River on Old Colony Railroad in Massachusetts.

1866. Chicago, Rock Island and Pacific Railroad laid 2,000 Burnettized cross-ties.

1867. Philadelphia & Reading Railroad built a Burnettizing plant at Pottstown, Pa. So did the Union Pacific Railroad, at Omaha, Nebraska. Introduction of Robbins' process for smoking wood with the vapors of coal-tar and of creosote. Seeley patented pressure process for treating green timber with oleaginous and saline materials, and erected plants in New York, Chicago, and at the St. Clair Flats in Michigan, the United States Government using the process at the latter place for preserving the timbers along its canal. Burnettized ties used on the Lehigh & Susquehanna Railroad. W. H. Smith encased timber in vitrified earthenware pipes, and filled in with hydraulic cement.

1868. Seeley patented an open-tank process for treating green timber with creosote oil. Beer washed out the sap from wood with a solution of boiling borax.

1869. Louisville & Nashville Railroad treated stringers and piles with the Bethell Process.

1870. Thilmany used sulphate of copper or sulphate of zinc and chloride of barium in treating ties for the Baltimore & Ohio, Wabash, New York, Pennsylvania & Ohio, Lake Shore & Michigan Southern, Cleveland & Pittsburgh and other railroads.

1871. Thomas immersed wood in rosin oil. Webb bored holes in the wood and filled them with creosote.

1872. Fletcher boiled in coal-tar creosote some cypress paving blocks which were laid in New Orleans, La. Constant and Smith tried to preserve wood by smoking it with vapors of coal-tar in a retort. Detwiler and Van Gilder impregnated wood with rosin dissolved in naphtha under pressure.

≥ 1874. Rutgers introduced in Germany a method of treating ties with a mixture of zinc chloride and creosote.

- 1875. Louisville & Nashville Railroad built a Bethell plant at West Pascagoula, La., to treat piles, stringers and ties. This plant laid the foundation for modern timber-treating in this country.
- 1876. Houston & Texas Central Railroad built a Bethell plant at Houston, Texas, to treat piles and timbers. Central Railroad of New Jersey installed cross-ties treated by the Bethell process.
- ³1878. Commercial creosoting plant opened at Long Island City, New York.
- N1879. Boulton patented a process to extract the moisture from wood and simultaneously inject creosote. New Orleans & North Eastern Railroad built a pressure plant to treat with creosote, at Slidell, La., the timber to be used for a trestle across Lake Ponchartrain. Wellhouse employed zinc chloride, glue and tannin for preserving wood. Commercial creosoting plant built at Slidell, La.
- 1880. Houston & Tennessee Central Railway installed ties treated by the Bethell process. Pine piles treated by the Thilmany process used at Norfolk, Va.
 - 1881. Commercial creosoting plant erected at Portsmouth, Va.
- 1882. Fladd patented process of impregnating freshly-cut wood with copper sulphate and other chemicals by suction.
 - 1883. Hagen used gypsum as a plug for zinc-chloride treated wood.
- 1884. Boston & Maine Railroad installed Kyanized ties. Commercial creosoting plant erected at Seattle, Wash. Vulcanized pine ties laid on the Manhattan Elevated Railroad in New York City.
- 1885. Atchison, Topeka & Santa Fe Railroad built a Burnettizing plant at Los Vegas, New Mexico.
- 1886. Chicago, Rock Island & Pacific and the Union Pacific rail-roads used ties treated by the Wellhouse process. Lehigh Valley Rail-road installed ties treated by the Bethell process.
- 1887. Southern Pacific Railway (Atlantic System) began treating Texas pine ties by the Burnett process at a leased plant.
- 1888. New Orleans Wood-Preserving Company erected a plant at New Orleans, La., to treat ties by the Burnett process, and piles and lumber by creosoting, for Texas & New Orleans Railroad.
- 1889. Southern Pacific Railway built a plant at West Oakland, Cal., employing either the Bethell or Curtis & Isaacs creosoting processes for treating ties and piles.
- 1890. Texas & New Orleans Railroad built a Bethell plant at Houston, Texas.
- 1891. Southern Pacific Railway (Atlantic System) built a Burnettizing plant at Houston, Texas. The D. & I. Railroad used ties treated by the Wellhouse process.
- 1892. Commercial Burnettizing plant built at Beaumont, Texas, and a commercial Bethell plant erected at the same place.

- 1893. Southern Pacific Railway (Pacific System) erected a portable Burnettizing plant for treating ties at Latham, Oregon.
- 1895. Louisville & Nashville Railroad put up a treating plant at Gautier, Miss., which was rebuilt in 1916. Commercial creosoting plants were built at Bay City, Mich., and Lowell, Wash.
- 1896. Pennsylvania Lines West installed ties treated by the Wellhouse process. Commercial creosoting plant was erected at Buell near Norfolk, Va.
- 1897. Atchison, Topeka & Santa Fe Railway built Burnettizing plants at Somerville, Tex., and at Bellemont, Arizona. Hasselman patented process for injecting into wood a solution of iron and aluminum sulphate, adding kainit to neutralize the free acids formed.
- 1899. Chicago, Burlington & Quincy Railroad erected a Burnettizing plant for treating ties at Sheridan, Wyoming. Chicago & Eastern Illinois Railroad used the Wellhouse process for treating ties. Commercial plant using the Burnettizing and Allardyce processes erected at Mt. Vernon, Illinois. Commercial plant vulcanizing ties removed from New York City to Perth Amboy, N. J., later using the creo-resinate process, and in 1906 transferred to Norfolk, Va.
- 1900. Chicago & Alton Railroad used Burnettized and creosoted ties and timbers.
- 1901. Great Northern Railway built a plant at Somers, Mont., to treat ties by Burnettizing. Missouri, Kansas & Texas Railroad used the Wellhouse process for treating ties at Greenville, Texas. Mexican Central Railway built a Burnettizing plant at Aguas Calientas, Mexico, to treat ties. Commercial creosoting plant erected at Southport near New Orleans, La., and one at Norfolk, Va. A non-pressure wood-preserving plant erected at Portland, Oregon. Bevier invented creo-resinate process.
- 1902. Rueping patented the injection of compressed air into wood ahead of creosote. El Paso & Southwestern Railroad erected a creosoting plant at Alamogorda, N. M., for treating paving blocks, wooden pipe and crossing plank. Chicago, Burlington & Quincy Railroad tried the Hasselman process. Commercial plants using various processes erected at Carbondale, Ill., and at Texarkana, Arkansas.
- 1903. Union Pacific Railroad erected a Burnettizing plant at Laramie, Wyo., for treating ties, telegraph poles, dimension timbers and crossing plank. Chicago & Northwestern Railway built a plant at Escanaba, Mich., for treating ties, using first the Wellhouse, then the Card and now the Burnett processes. Grand Trunk and Wabash Railroads installed Burnettized cross-ties. Commercial creosoting plant erected at Indianapolis, Ind., and one for using various processes built at Cimarron, N. M. Guissani open-tank process promoted in New York.

1904. Von Schrenk revived the Seeley open-tank process at the Exposition in St. Louis, Mo. Rueping took out United States patents. Oregon-Washington Railroad & Navigation Company erected a creosoting plant at Wyeth, Oregon, for treating ties, piles, switch-ties, dimension timbers, and paving blocks. Chicago, Milwaukee & St. Paul Railroad employed the Rueping process. The Big Four (Cleveland, Cincinnati, Chicago & St. Louis Railroad) used ties treated with creosote by a commercial wood-preserving plant at Shirley, Indiana. Kansas City Southern Railroad installed Burnettized cross-ties. Commercial plants for treating wood by various processes were erected at Grenada, Miss., Sandstone, Minn., and Terre Haute, Indiana. Organization of the Wood-Preservers' Association (changed to American Wood-Preservers' Association in 1912).

1905. Lowry patented pressure process, using creosote with quick final vacuum. The first plant to use the Lowry process was erected at Shirley, Indiana. St. Louis & Southwestern Railroad used zinc-creosote treated ties, and the T., St. L. & W. Railroad Burnettized crossties. Delaware, Lackawanna & Western Railroad installed creosoted bridge-ties. Salt Lake & San Francisco Railroad installed ties treated by the Rueping process. Commercial plant using Bethell process erected at Maurer, N. J. Other commercial creosoting plants were built at Galveston, Tex., and Minneapolis, Minn.

1906. Card invented an improvement on the zinc chloride-creosote process. Atchison, Topeka & Santa Fe Railway erected a creosoting plant at Somerville, Tex. Kansas City Southern Railroad used creosoted cross-ties. Commercial creosoting plants were erected at Gulfport, Miss., Winnfield, La., Eagle Harbor, Wash., and Newark, N. J., and a plant employing the Card process was built at Waukegan, Illinois.

1907. Northern Pacific Railway erected Lowry plants at Brainerd, Minn., and at Paradise, Montana. Florida East Coast Railroad installed creosoted cross-ties. Lowry plants were erected at Marion, Ill., Bloomington, Ind., Springfield, Mo., Kansas City, Mo., and Hugo, Oklahoma. Atchison, Topeka & Santa Fe Railway built a crude oil plant at Albuquerque, N. M., which was later used for creosoting. Commercial plants using various processes were erected at Argenta, Ark., Evansville, Ind., and Buell, Va. A commercial creosoting plant was built at Mobile, Alabama. The Chicago, Burlington & Quincy Railroad erected a plant at Galesburg, Ill., for treating ties and timbers with either creosote, or zinc chloride, or both in combination. Delaware, Lackawanna & Western Railroad built a non-pressure plant at Nanticoke, Pa., and the Philadelphia & Reading Coal and Iron Company a similar one at New Philadelphia, Pa. The United States Government operated non-pressure plants at Keokuk, Iowa, Milan, Ill., Stillwater, Minn., and Fountain City, Wis.

1908. San Pedro, Los Angeles & Salt Lake Railroad erected a plant at San Pedro, Cal., to use either the Burnett or creosoting processes.

Bunker Hill & Sullivan Mining Company built a creosoting plant at Kellogg, Idaho. A commercial Bethell plant was erected at Atlanta, Georgia. A Lowry process plant was put in operation at Brainerd, Minn., by the Northern Pacific Railway.

1909. Tennessee Coal, Iron and Railroad Company built a non-pressure creosoting plant at McAdory, Alabama, for treating ties, telegraph poles, dimension timbers, and fence posts. Missouri, Kansas & Texas Railway built a Rueping plant at Dennison, Tex., for treating practically all kinds of timber. Union Pacific Railway built a Burnettizing plant at Topeka, Kansas. Pennsylvania Railroad erected a wood-preserving plant at Mt. Union, Pa. Commercial creosoting plants were erected at Bound Brook, N. J., Toledo, O., Paterson, N. J., and Columbus, Ohio. A commercial Burnettizing plant was built at Joppa, Ill., and a plant using various processes at Madison, Illinois.

1910. Pennsylvania Railroad erected a wood-preserving plant at Greenwich Point, Philadelphia, Pa. The Buffalo, Rochester & Pittsburgh Railroad built a Bethell plant at Bradford, Pa. Commercial creosoting plants erected at Shreveport, La., Rome, N. Y., Toledo, O., and Texarkana, Texas.

1911. A commercial creosoting plant erected at Ensley, Ala., and a plant for treating wood by various processes was built at Broadford Junction, Pa. The Pittsburgh & Lake Erie Railroad used creosoted ties.

1912. Philadelphia & Reading and Central Railroad of New Jersey erected a creosoting plant at Port Reading, N. J. Baltimore & Ohio Railroad built a Card process plant at Green Spring, W. Va. Atlantic Coast Line Railroad erected a Bethell plant at Gainesville, Florida. Central of Georgia Railroad put up a plant at Macon, Ga., to treat wood by the Card process. Charlotte Harbor & Northern Railroad built a creosoting plant at Hull, Florida. Commercial plants using various processes built at Terre Haute, Ind., Houston, Tex., Orrville, O., St. Helens, Oregon, Tacoma, Wash., Yardley, Wash., Pensacola, Fla., Louisville, Miss., Bogalusa, La., and Linnton near Portland, Oregon. Incorporation of the American Wood-Preservers' Association (formerly called Wood-Preservers' Association.)

1913. Louisville & Nashville Railroad erected a plant at Guthrie, Kentucky. Commercial creosoting plants built at Bay City, Mich., Metropolis, Ill., and Indianapolis, Ind.

1915. Chicago & Northwestern Railway erected a plant at Riverton. Wyo. Ties of the Chesapeake & Ohio, the Chesapeake & Ohio Northern and the Hocking Valley Railroads treated at a commercial Lowry plant at Russell, Ky. A commercial plant erected at Brunswick, Georgia.

1916. Boston Elevated Railway erected a creosoting plant at South Boston, Mass. A commercial creosoting plant built at Seattle, Wash.

PROGRESS IN WOOD PRESERVATION.

The growth of the wood-preserving industry in the United States, begun in an experimental way in 1832, has been rapid. At first Kyan's process of treating wood with bichloride of mercury was used, but real progress in wood preservation in this country did not begin until about 1838, when Burnett's zinc-chloride process and Bethell's coal-tar-creoscte process for protecting wood against decay were introduced. Many other processes for preserving wood have been tried on a commercial scale with varying success, and manufacturers of machinery and supplies have made improvements that have made possible more economical operation of timber-treating plants. The merits of treated wood, notably its durability and economy in service, are also better known, and consumption is on the increase.

Undoubtedly the greatest impetus given to the wood-preserving industry in this country has been the advancing cost of timber, due to its wasteful consumption and increasing scarcity. At first the demand for treated wood was confined to comparatively few forms and kinds of material, because there was a large supply of cheap and durable timbers to be had, and as the equipment of the treating plant was expensive and the success of the processes considered uncertain, the early growth of wood preservation was slow.


Only 15 plants were in operation in the United States in 1895, but since then the number has rapidly increased. In 1914 there were 122 plants, of which 94 were in operation and reported an output of 159,582,639 cubic feet of treated timber, comprising railroad ties, piles, poles, paving blocks, structural timbers, cross-arms, lumber and miscellaneous kinds of wood. In 1915 the United States had no less than 127 plants of all kinds, and of these 102 were active, reporting a total output of 141,858,963 cubic feet of treated material. The accompanying table and diagrams will give some idea of the growth in output of treated timber in the United States from 1909 to 1915 inclusive.

The majority of the wood-preserving plants in the United States are of the pressure type; that is, the preservative solution is forced into the wood by means of pumps. Sixty-four of the plants in operation in 1915 were so-called commercial plants, which treat wood by contract, 30 were operated by railroads, and eight were owned by mining companies and municipalities. The location of these plants is shown on the map on page 21.

In 1915 the quantity of miscellaneous lumber treated in the Atlantic Coast Region exceeded that of any other region. There were treated in that year: 7,428,938 cross-ties; 3,500,821 linear feet of piles; 11,697 poles; 552,095 square yards of paving blocks; 28,298,805 board feet of construction timber; 16,757 cross-arms; 4,634,655 board feet of miscellaneous lumber. The preservatives used in this region in 1915 were: Creosote, 30,236,615 gallons; zinc-chloride, 2,077,877 pounds; other

preservatives, 50,080 gallons. During the year 1915 there were 20 plants in operation in this region.

In the Southern Coast Region, the 27 plants in operation during 1915 held the lead in the quantity of construction timber treated. The output for that year was: Construction timber, 77,798,523 board feet; cross-ties, 8,958,293; piles, 3,817,927 linear feet; poles, 66,216; paving blocks, 806,968 square yards; cross-arms, 121,945; miscellaneous lumber, 3,658,227 board feet. Of creosote there was used during the year 25,854,013 gallons, and of zinc-chloride, 9,767,867 pounds.

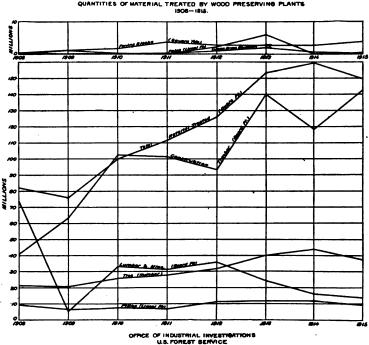

PROGRESS OF WOOD PRESERVATION IN THE UNITED STATES
QUANTITIES OF MATERIAL TREATED BY WOOD PRESERVING PLANTS

The Interior Eastern Region led in the quantity of paving material handled, and showed the largest consumption of miscellaneous preservatives. The output of the 29 plants reporting in 1915 was: 14,650,302 cross-ties; 138,639 linear feet of piles; 32,503 poles; 1,509,755 square yards of paving blocks; 18,914,931 board feet of construction timber; 2,211 cross-arms; and 1,809,064 board feet of miscellaneous lumber. Of preservatives there were used 22,333,674 gallons of creosote, 12,764,798 pounds of zinc-chloride, and 1,640,102 gallons other preservatives.

In the Interior Western Region, where 10 plants were in operation in 1915, the output was as follows: Cross-ties, 4,001,878; piles, 3,010

linear feet; poles, 3,107; paving blocks, 1,000 square yards; construction timber, 6,628,575 board feet; cross-arms, 56; miscellaneous lumber, 3,398,959 board feet. Of creosote there was used in 1915 a total of 2,395,411 gallons, and of zinc-chloride, 6,441,138 pounds.

The Pacific Coast Region had 16 plants in operation which reported the following output during 1915: Cross-ties, 2,046,177; piles, 1,848,022 linear feet; poles, 12,116; paving blocks, 66,552 square yards; construction timber, 10,368,207 board feet; cross-arms, 5,250; miscellaneous lumber, 436,604 board feet. The preservatives used in treating this timber were: Creosote, 3,245,292 gallons; zinc-chloride, 2,217,924 pounds; other preservatives, 3,362 gallons.

The output of the 102 plants in operation in the United States during 1915 was as follows:

Cross-ties	. 37.085.585	pieces.
Piles	. 9,308,419	linear feet.
Poles		
Paving Blocks	. 2,936,370	square yards.
Construction Timber		
Cross-arms	. 146,219	pieces.
Miscellaneous Lumber	. 13,937,509	board feet.

Total equivalent to .. 141,858,963 cubic feet.

The preservatives consumed in 1915 were as below:

Creosote	(Foreign) . (Domestic)	• • • •	37,501,007 43,358,435	gallons.
		•	20 250 440	"

In view of the fact that the railroads are the largest users of preserved wood, it is of interest to see the kinds of cross-ties that made up the 37,085,585 treated in 1915, and also the preservative used for each kind of wood, as given in the table on page 19.

The influence of railway practice on the growth of the woodpreserving industry is illustrated in the following table, which shows that the increase in the number of plants operated has been coincident with the increase in the number of ties treated.

Preserve wood and conserve woodland.

16

MATERIAL TREATED IN THE UNITED STATES.

Preservatives.	Year.	Cross Ties. Cu. Ft.	Piles. Cu. Ft.	Poles. Cu. Ft.	Paving Blocks. Cu. Ft.	Construction Timbers, Cu. Ft.	Cross- Arms. Cu. Ft.	Lumber and Miscellaneous. Cu. Ft.	Total Material Treated. Cu. Ft.
Creosote	1909 1910 1911 1912 1913 1914 1915	29,830,080 44,525,229 49,532,163 57,6461,515 75,998,307 67,774,329 51,231,207	4,421,726 5,219,254 4,937,363 7,624,939 7,630,328 7,804,657 6,288,238	659,664 255,597 106,213 1,169,981 2,367,769 1,188,511 2,336,318	2,994,290 4,692,453 10,145,724 7,091,658 6,810,308 3,127,506 1,174,319	4,902,311 7,801,272 7,417,105 6,822,493 10,308,883 8,389,158 9,264,164	41,764 88,069 71,961 1,643,128 1,813,010 395,403 87,373	417,787 2,687,713 2,499,995 2,841,195 1,853,993 1,348,566 981,028	43,267,622 65,269,587 74,710,524 84,724,909 106,782,598 90,027,630 85,115,647
Zinc Chloride	1909 1910 1911 1912 1913 1914	24.153,162 27,587,583 28,532,883 28,532,874 36,020,755 53,457,852	ч ч ч ч ч ч ч 4,	a a 18,246 47,996 b	લાલા લાલા લાલા	320,891 541,314 1,043,851 259,972 285,756 1,317,925 2,406,150	ന ന ന ന ന ന	2,333 71,060 119,931 20,092 7,570 4,357 275,279	24,476,386 28,200,157 29,501,665 28,831,184 36,693,238 51,343,035 56,144,007
Zinc-Creosote	1909 1910 1911 1912 1913 1914	8,095,794 6,354,219 7,312,374 8,7312,374 6,938,838 5,868,838 6,548,136	38,392 b 57,874 327,594 2,320	2 2 2 0 110,220	. പെടുത്തത്ത	62,918 181,143 50,613 758,989 140,718 40,396	તા તા તા તા તા તા ત	43,699 30,646 b, 10 99,367 53,628 b, 4,822	8,202,411 6,604,400 7,312,374 8,072,157 8,079,552 6,009,552 6,705,894
All Preservatives	1909 1910 1911 1912 1913 1914	62,079,036 78,467,031 85,182,420 97,183,009 120,781,248 131,540,561 111,256,755	4,421,726 5,257,646 4,937,363 7,937,922 8,061,902 6,295,284	659,664 255,597 106,213 1,188,579 2,500,420 1,482,407 2,512,780	2,994,290 4,692,453 10,145,724 7,397,095 6,856,293 6,869,370 7,707,971	5,286,120 8,523,929 8,460,956 7,793,524 11,653,628 9,847,601 11,834,087	41,764 88,649 71,961 1,643,128 1,824,719 417,914	463,819 2,789,419 2,619,226 2,038,686 2,039,658 1,362,284 1,161,459	75,946,419 100,074,144 111,524,563 125,931,056 153,613,888 159,582,639 141,858,963

Norg ... Figures furnished by United States Forest Service. (a). No Statistics. (b). Figures, if used, would reveal identity of reporting firms.

CONVERTING FACTORS.

cross ties, divide figures shown by 3.

linear feet of piles, divide the figures shown by .5868.

square yards of paving blocks, divide the figures shown by 2.625.


square yards of paving blocks, divide the figures shown by 2.625.


board feet of construction tumbers, multiply the figures shown by 12.


cross-arms, divide the figures shown by 5.6198.


board feet of lumber and miscellaneous material, multiply the figures shown by 12, the number of c the number of li the number of si the number of so the number of c the number of c


MATERIAL TREATED IN THE UNITED STATES. TOTAL MATERIAL.

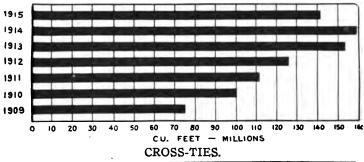




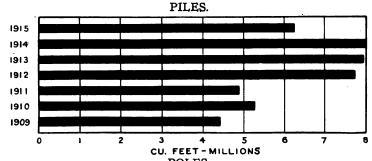


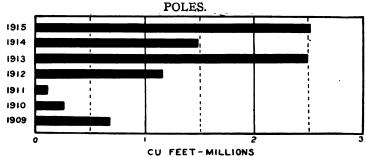




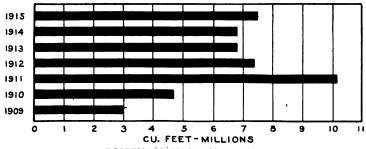


CONSTRUCTION TIMBER.



CU. FEET - MILLIONS CROSS-ARMS.



MISCELLANEOUS LUMBER.



CROSS-TIES TREATED IN THE UNITED STATES DURING 1915.

	-											
Preservative.	Oak.	Yellow Pine.	Douglas Fir.	Western Pine.	Western Pine. Beech. Gum.	Gum.	Tamarack. Maple. Birch. Elm.	Maple.	Birch.	Elm.	Other Kinds.	Total.
Creosote	7,365,673	,365,673 5,243,516	787,247	301,581	301,581 2,469,202 1,650	1,650	390,017 36,626 173,916	36,626	173,916	:		307,641 17,077,069
Zinc Chloride		3,257,565	7,954,492 3,257,565 2,760,952 1,702,167 100,000 204,653	1,702,167	100,000	204,653	449,660	316		50,846	55 50,846 1,338,578 17,819,284	17,819,284
Zinc Chloride and Creosote.	1,565,352	40,122		3,861	3,861 364,535 71,583	71,583	91,496	:	, :	:	45,763	2,182,712
Miscellaneous .			5,655	:		:	865	:	. :	:	:	6,520
Total	16,885,517	8,541,203	16,885,517 8,541,203 3,553,854 2,007,609 2,933,737 277,886	2,007,609	2,933,737	277,886	932,038	36,942	173,971 50,846	50,846	1,691,982	37,085,585
Per cent of total treated	45.53%	45.53% 23.03%	9.58%	5.42%	9.58% 5.42% 7.91% 0.75%	0.75%	2.51%	0.10%	2.51% 0.10% 0.47% 0.14%	0.14%	4.56%	100.00%


CROSS-TIES TREATED IN THE UNITED STATES.

	1	Number	of Mile	es				Number
Year	RA	TEAM ILROADS	Horse and Elec.	Total	Number of Ties Used	Number of Ties Treated	% Treat- ed	Treating Plants In
	Main Tracks	Other Tracks	D					Opera- tion
1860	30626	3000	200	33826	10147800	-1		
1870	52922	9100	1200	63222	18966600	50,000	0.10	3
1880	93267	21977	2000	117244	35173200	J		
1885	123320	32868	2800	158988	47696400	120000	0.25	5
1886	125185	34441	3120	162746	48823800	510000	1.04	5
1887	137028	37348	3680	178056	53416800	594000	1.11	5
1888	145387	38221	4112	187720	56316000	644000	1.14	6
1889	153725	42242	4930	200897	60269100	615000	1.02	7
1890 1891	163597 168403	42036 47746	5241 6155	213874 222304	64168200 66691200	650000 697000	1.01 1.05	8 8
1071	100403	4//40	0133	222304	00091200	097000	1.05	٥
1892	171564	50787	7040	229391	68817300	790000	1.15	9
1893	176461	53676	8870	239007	71702100	812000	1.13	10
1894	178709	54825	8949	242483	72744900	920000	1.26	11
1895	180657	56237	10810	247704	74311200	1289000	1.73	12
1896	182777	57352	12133	252262	75678600	1307000	1.73	13
1897	183284	58729	13765	255778	76733400	1312000	1.71	13
1898	184648	60686	15942	261276	78382800	1826000	2.33	13
1899	187535	62608	17665	267808	80342400	2510000	3.12	15
1900	192556	66228	19314	278098	83429400	2800000	3.36	15
1901	195562	69790	22217	287569	86270700	4101000	4.75	17
1902	200155	74041	25592	299788	89936400	6180000	6.87	22
1903	205314	78508	27754	311576	93472800	9010000	9.64	27
1904	212243	84830	29548	326621	97986300	12800000	13.06	30
1905 1906	216974 222340	89823 94643	32517 36212	339314 353195	77982000 102834000	14890000 16880000	19.09 16.41	34 39
1900	222340	94043	30212	333133	102834000	10000000	10.41	39
1907	227455	100520	38812	366787	153700000	19856000	12.92	51
1908	233468	103152	40247	376867	112463000	23776000	21.14	57
1909 1910	236834	106949 110936	40490	384273 391317	123751000 148231000	22033000 30544000	17.80 20.60	68 75
1911	240293 243979	116586	40088 41088	401653	135053000	31141000	23.06	81
	473773		71000		155555000			
1912	246777	121386	42110	410273	123081900	32394000	26.32	87
1913	249777	126038	43043	418858	125657400	40260000	32.04	92
1914	252230	130661	43989	426880	128064000	43847000	34.24	95 102
1915	255000	135000	44500	434500	130350000	37085585	28.40	102

Mileage of steam railroads from 1890 to 1914 from records of Interstate Commerce Commission.

Cross-ties used and treated from 1906 to 1911 from Census Reports.

Cross-ties used from 1860 to 1905 and from 1912 to 1915 estimated on basis of 300 ties per mile.

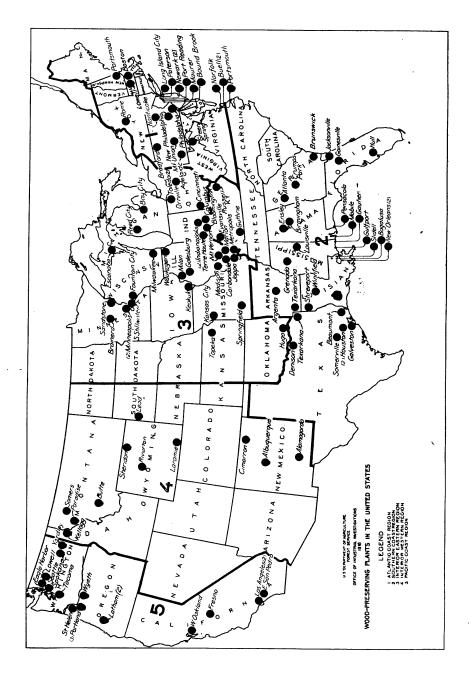

PROCESSES FOR PRESERVING WOOD.

Inventors have been busy for years endeavoring to find ways and means of protecting wood against decay and from destruction by fire. Although many demonstrations have been made to prove the merits of new processes or preservatives, comparatively few discoveries are ever commercial successes.

The processes of commercial importance are those that either coat a piece of wood with a superficial absorption of preservative, or impregnate the interior of a piece of wood with a preservative under pressure.

In the non-pressure processes the superficial coating of preservative is obtained by brushing or spraying it on, or by dipping or soaking the wood in tanks of the preservative. Where only small lots of material are to be treated and the treated wood will not be abraded or split through the coating of preservative, these processes are economical.

The pressure processes, used wherever large quantities of wood are treated, affect deep penetration of the preservative, thereby protecting the interior of a piece of wood against decay. The depth of penetration attainable is dependent upon a number of factors, chief among which are the kind of wood, the character of its growth, its condition as to seasoning and solidity, the method of treatment, and the preservative used.

The simplest and oldest form of wood preservation is to brush the preservative into the stick to be treated, repeating the application two or more times. A container to hold and in which to heat the preservative is generally necessary. The labor cost of such treatment is comparatively high.

Where wood is in place and brushing preservative on it is inconvenient, spraying it is sometimes adopted. The waste of preservative is against general use of this method of application. Dipping or steeping a piece of wood in open tanks of suitable size, filled with preservatives, will assure a superficial covering with preservative deeper than that to be had by simply brushing on the preservative. The wood is immersed in hot or cold preservative and left to soak up all that it will. Or it is sometimes kept in boiling preservative for several hours and then plunged into cold preservative. In some cases the wood is placed in closed cylinders and the preservative made hot, though no pump pressure is applied. The time of treatment varies greatly, but a hot bath of one to two hours followed by a cool bath of the same period is usually enough. The best results from non-pressure processes are had only when thoroughly-seasoned wood is used. A disadvantage of brush, spray, and open-tank treatment is the loss of preservative through evaporation.

The locations of many non-pressure plants are given on page 40. Details as to the erection of similar plants may be had from the manu-

facturers listed on page 35. Particulars as to methods of treatment may be had from the purveyors of preservatives listed on page 30.

The general method of impregnating wood with a preservative is in cylinders, which range in size from 72 inches in diameter and 42 feet long to 108 inches in diameter and 172 feet long. The preservative is forcibly injected into the wood by means of pumps.

The two leading preservatives used in the pressure processes are creosote and zinc chloride, either alone or together, and the absorption per cubic foot of wood treated varies from 2 to 20 pounds of creosote, and usually from 0.5 to 0.75 lb. dry zinc chloride. The maximum quantity of creosote is usually injected into piles and other marine timbers that are subject to attack of the teredo and other marine borers; in land situations where decay is the principal source of failure about one-half as much creosote is injected into the wood. Zinc chloride is best adapted to timber for use in arid or semi-arid regions, where precipitation is too low to leach out the preservative, and where low first cost is essential. The pressure processes are divided into:

- (1). Full-Cell treatments, which force into and leave in wood practically all the preservative it will hold where penetrated, thereby giving maximum protection against decay for that depth of penetration; and
- (2). Empty-Cell treatments, which aim to reduce materially the final retention of preservative, while not reducing the depth of penetration.

Either green or seasoned timber can be treated by the pressure processes. When green timber is put into the cylinder it is often seasoned by means of live steam, followed by a vacuum to dry the wood before treatment. A vacuum is also drawn at the end of the treatment to hasten the draining of the surplus from the cylinder and to dry the timber.

The better-known pressure processes used in the United States are:

Bethell.—(Full-Cell Process.)

Patented by John Bethell in England in 1838. Commonly used for the treatment of piles, poles, cross-arms, paving blocks, structural timbers, lumber, and ties. Consists essentially of the following steps:

- a. Preliminary vacuum one-half to one or more hours.
- b. Oil injected under pressure, maximum usually between 100 and 180 fbs. per square inch.
 - c. Final vacuum (sometimes omitted).

Green timber is usually subjected to a live steam bath at about 20 lbs. pressure for several hours before the preliminary vacuum. Seasoned timber is not usually steamed in this process, except in the case of paving blocks. The amount of oil injected depends upon the specifi-

cations of the purchaser, but the absorption per cubic foot is usually within the following ranges:

Lumber, poles, structural timbers, cross-arms, ties, freshwater and land piles, 8 to 12 pounds.

Paving blocks, 12 to 20 pounds. Salt water piles, 16 to 24 pounds.

Boiling.

Patented by W. G. Curtis and John D. Isaacs in 1895 and reissued the same year. (U. S. patent 545,222, and reissue 11,515).

Used chiefly for creosoting Douglas fir piles, timber, lumber, ties, and paving blocks. Consists essentially of the following steps:

- a. Wood (either green or seasoned) in the retort is covered with oil at about 160° F.
- b. Oil heated to 225° to 250° F. at atmospheric pressure and vapors passed through a condenser.
- c. Heating continued until rate of condensation falls to 1/6 to 1/10 of a pound of water per cubic foot of wood per hour. This frequently requires 40 to 60 hours for green timber, and sometimes more.
 - d. Retort filled with cool oil, allowing temperature to fall.
- e. Pressure applied, maximum 120 to 150 fbs. per square inch, until desired absorption obtained; usually 10 to 12 fbs. per cubic foot.

Boulton.—(Boiling Under Vacuum.)

Patented by S. B. Boulton in England and the United States. (See U. S. patent 247,602, issued Sept. 27, 1881), also by O. P. M. Goss in the United States. (See U. S. patent 1,167,492, issued in 1916).

Used chiefly for the treatment of Douglas fir piles, timber, ties, lumber and paving blocks. Consists essentially of the following steps:

- a. Timber immersed in hot creosote and subjected to a vacuum, and the escaping vapors drawn through a condenser.
- b. Temperature (usually 190° F. to 210° F.) and vacuum maintained until the rate of condensation of water falls to a specified amount per cubic foot of wood per hour, usually 1/6 to 1/10 of a pound.
- c. Vacuum discontinued and pressure applied until desired absorption obtained.

The object of the vacuum is to evaporate the water from the wood at a lower temperature than in the ordinary steaming or straight-boiling process.

Burnett.

Patented in England in 1838 by William Burnett.

In general use for treating ties, lumber and timber with zinc chloride. Consists essentially as follows for seasoned wood:

a. Preliminary vacuum.

b. Zinc chloride solution applied under pressure of 100 to 175 tbs. per square inch, to approximate refusal.

For green timber a steaming period of one to five or more hours at about 20 lbs. is usually applied before the vacuum. The strength of the zinc solution generally is so regulated that at refusal the timber will have absorbed from 1/4 to 1/2 lb., usually the latter, of dry zinc chloride per cubic foot.

Card.

Patented by J. B. Card in 1906, (U. S. patent 815,404). Used chiefly for ties, lumber, and timbers. The essential parts of the process are:

- a. The use of a mixture containing about 80% of zinc chloride solution and 20% creosote.
- b. The method of keeping the zinc chloride and creosote mixed during treatment by means of a rotary pump, which draws the mixture from the top of the retort and returns it at the bottom through a perforated pipe.

The use of steaming, vacuum, and pressure are the same as in the Bethell process. It is customary to inject about ½ th. of zinc chloride and 2 to 3 ths. of creosote per cubic foot.

Lowry.—(Empty-Cell Process.)

Patented by C. B. Lowry in 1906. (U. S. patent 831,450). Used chiefly for creosoting air-seasoned cross-ties. Consists essentially of the following steps:

- a. Without first drawing a vacuum, creosote at not to exceed 200° F. is injected into the wood to refusal, or to a specific amount.
- b. A quick vacuum is drawn to remove the excess oil from the timber.

The air imprisoned by injecting the oil without a preliminary vacuum expands during the final vacuum, forcing out a certain amount of the oil with it. The process is classed as an empty-cell process for this reason. The net absorption is from 6-8 pounds per cubic foot.

Rueping.—(Empty-Cell Process.)

Patented in the United States in 1902 by Max Rueping. (U. S. patents 707,799 and 709,799). The second patent was reissued October, 1907. (Reissue 12,707).

Used chiefly for ties and lumber. Consists of the following steps:

- a. Retort, containing the wood, is filled with compressed air; the pressure varying with the kind and condition of the wood.
- b. Oil forced into retort, gradually allowing air to escape, but without reducing pressure.
- c. When retort is full of oil, pressure is increased to a maximum of 150 to 200 tbs. per square inch, and held to refusal, or until specified absorption is obtained.

d. Oil drained and vacuum drawn to remove excess of oil from the wood.

If green timber is treated, it is first artificially seasoned by steaming, boiling, or boiling under vacuum, before the air pressure is applied. Net absorption usually 4 to 6 fbs. per cubic foot.

Steaming.—(Colman Process.)

Not patented.

Used almost exclusively for the treatment of Douglas fir piles. Consists essentially of the following steps:

- a. Timber steamed at a pressure of 90 to 100 tbs. per square inch for 3 to 10 hours.
- b. Steam released and vacuum drawn until timber is considered seasoned. This sometimes requires 18 to 20 hours. The temperature within the retort during the vacuum period is usually maintained above 200° F.
- c. Oil is injected at a maximum pressure of 100 to 150 tbs. per square inch until desired absorption is obtained.

There are many other processes, the merits and demerits of which have been or are yet to be demonstrated. Most wood-preserving plants are equipped to treat by any processes desired by the user of the treated wood. They also may be relied upon to advise the kinds of treatments which will bring results to which they can point later with satisfaction.

Conservation by preservation is economy exemplified.

WOOD PRESERVATIVES.

The substances proposed as a means of protecting wood against destruction by fire, fungi, insects, or worms, include the following:

Aluminum sulphate. Animal oils. Barium carbonate. Barium sulphate. Borax. Cedar oil. Copper sulphate. Creosotes (coal-tar, watergas-tar, wood, petroleum.) Crude oil. Fish oil. Glue. Gums (various.) Iron sulphate. Lime hydrate. Linseed oil. Magnesium sulphate. Mercuric chloride. Molasses and low syrups.

Petroleum oils. Potassium carbonate. Potassium nitrate. Resins. Sodium carbonate. Sodium chloride. Sodium fluoride. Sodium muriate. Sodium sulphate. Sulphuric acid. Tannin. Tar. Tartaric acid. Vegetable oils. Wax. Whale oil. Zinc chloride. Zinc sulphate.

The merit of a wood preservative is determined either by its ability to poison fungi or bacteria, or to waterproof wood. Preservatives vary greatly in their toxicity (property to poison), and the greater their toxicity the longer will the wood keep sound. Toxic preservatives that will easily penetrate wood, do not affect its strength, and are obtainable at a reasonable price, are the most efficient and economical.

The consumption of wood preservatives in the United States for a series of years is given in the accompanying table.

WOOD PRESERVATIVES USED IN THE UNITED STATES.

Year	Number of Plants	Creosote. Gallons.	Zinc Chloride. Pounds.	Other Preservatives Gallons*.
1909 1910 1911 1912 1913	64 71 80 84 93	51,431,212 63,266,271 73,027,335 83,666,490 108,373,359	16,215,109 16,802,532 16,359,797 20,751,711 26,466,803	† 2,333,707 1,000,000 3,072,462 3,885,738
1914	94	79,334,606	27,212,259	{ 9,429,444‡ 2,486,637
1915	102	80,859,442	33,269,604	3, 205,563‡ 1, 693,544

*Includes crude oil, coke oven-tar, refined coal-tar and carbolineum oils. †Statistics not available. ‡'Paving oil."

Some preservatives like zinc chloride, mercuric chloride, and copper sulphate, are made from inorganic compounds which are soluble in water, and these will leach out of the wood when it is exposed to very wet surroundings. In dry localities, however, these inorganic preservatives will assure a considerably longer life to treated wood than could be expected of the untreated wood. Other preservatives, such as the creosotes, which are made from organic compounds, are more waterproof and less volatile.

Creosote.

The creosote suitable for preserving wood is derived from the tar obtained in the destructive distillation of wood, coal, petroleum, etc. Creosote oil, in the scientific sense, may be defined as any and all distillate oils boiling between 200° and 400° Centigrade, which are obtained by distillation from tars consisting principally of compounds belonging to the aromatic series and containing well-defined amounts of phenoloids.

Creosote is the most important wood preservative, and has been in use for this purpose for a great many years. The consumption of creosote oil in the United States in the five years from 1909 to 1913 more than doubled, and in the seven years from 1909 to 1915 was as follows:

Year	Total Creosote Used.	Domestic Creosote.	Per Cent of Total	Imported Creosote.	Per Cent of Total
	Gallons.	, Gallons.		Gallons.	
1909 🕜	51,426,212	13,862,171	27	37,569,041	73
1910	63.266.271	18,184,355	. 29	45.081.916	71
1911	73,027,335	21,510,629	29	51,516,706	71
1912	83.666.490	31,135,195	37	52,531,295	63
1913	108,373,359	41,700,167	38	66,673,192	62
1914	79.334.606	28,026,870	. 35	51.307.736	65
1915	80,859,442	43,358,435*	54	37,501,007	46

CREOSOTE USED IN THE UNITED STATES.

The domestic production of creosote oil has grown steadily, especially since the European war interfered with exports to the United States. In 1914 the production of creosote oil in the United States amounted to 28,026,870 gallons, and a year later had nearly doubled to 43,358,435 gallons. Domestic manufacturers furnished 35% of the total amount of creosote oil used in 1914, and in 1915 they supplied 54%. The imports in 1914 amounted to 65% of the total consumption of creosote oil in the United States, and in 1915 the foreign supply fell to 46%.

Specifications for coal-tar creosote oil, calculated on the basis of the dry oil when distilled by the common method (using an 8-oz. retort, asbestos covered, with standard thermometer, bulb ½ in.

^{*41,333,890} gals. coal-tar and 2,024,545 gals. water-gas-tar.

above the surface of the oil), prepared by the American Railway Engineering Association, are as follows:

Distillation	Grade 1.	Grade 2.	Grade 3.
Below 210° C	5%	8%	10%
" 235° CNot over	25%	35%	40%
Residue above 355° C. Over	5%—soft	5%soft	5%—soft
Water	3%	3%	3%
Specific gravity at 38° C	1.03	1.03	1.025

Grade 1 oil shall be a pure product obtained from coal-gastar or coke-oven-tar, and shall be free from any tar, including coal-gas-tar and coke-oven-tar, oil or residue obtained from petroleum or any other source; it shall be completely liquid at 38° C., and shall be free from suspended matter. Oils 2 and 3 shall be the best-obtainable grades of coal-tar creosote.

The specifications for creosote oil prepared in behalf of the American Society of Municipal Improvements in October, 1916, by that association's Committee on Standard Specifications for Creosoted Wood Block Paving, are as follows:

"A" Coal-Tar Paving Oil: A coal-tar product at least 65% a distillate of coal-gas tar or coke-oven tar; the remainder refined or filtered coal-gas tar or coke-oven tar.

"B" Coal-Tar Distillate Oil: A distillate of coal-gas tar or coke-oven tar.

	"A"	"B" ←
Water	Not more than 3%	Not more than 3%
Matter insoluble in benzol	Not more than 3%	Not more than 0.5%
Specific gravity at 38° C. Distillates	Between 1.07 and 1.12	Not less than 1.06
Up to 210° C	Not over 5%	Not over 5%
Up to 235° C	Not over 25%	Not over 15%
Residue above 355° C	If over 35% shall have	If over 10% shall have
	float test of not over 80 sec. at 70° C	float test of not over 50 sec. at 70° C.
Specific gravity of fraction between 235°C and 315°C	Not less than 1.02 at 38°/ 15.5° C	Not less than 1.02 at 38°/ 15.5° C.
Specific gravity of fraction between 315° C and 355° C	Not less than 1.09 at 38°/ 15.5° C	Not less than 1.09 at 38°/ 15.5° C.
Coke residue	Not more than 10%	Not more than 2%

Zinc Chloride.

The principal water-soluble salt which is used as an antiseptic for destroying fungi that attack wood in localities that are not excessively wet is zinc chloride, which has been employed as a wood preservative for nearly forty years. It is purchased either in the fused state or in a concentrated solution. Fused zinc chloride should contain at least 94% of water-soluble chloride of zinc, and be free from acids. It should be practically free from soluble iron or other inorganic impurities insoluble in hydrochloric acid. The concentrated solution contains about 50% water, and this is the form in which zinc chloride is injected into wood. The consumption of zinc chloride in the United States for preserving wood amounted in 1914 to 27,212,259 pounds, and in 1915 to 33,269,604 pounds.

A number of patented, proprietary wood preservatives are being marketed. They are used generally in gallon or barrel lots in localities near their points of manufacture, to minimize the cost of their transportation.

MANUFACTURERS OF OR DEALERS IN WOOD PRESERVATIVES.

Creosote.

UNITED STATES.

American Tar Products Co., 208 La Salle St., Chicago, Ill.; Milwaukee, Wis.; St. Louis, Mo.; Steubenville, O.; Woodward, Ala.; Youngstown, O.

Armitage Mfg. Co., 2716 E. Grace St., Richmond, Va.

Barnaby & Co., Colman Bldg., Seattle, Wash.

Barrett Co., The, 17 Battery Place, New York; Birmingham, Ala.; Boston, Mass.; Chicago, Ill.; Cincinnati, O.; Cleveland, O.; Detroit, Mich.; Kansas City, Mo.; Louisville, Ky.; Minneapolis, Minn.; Nashville, Tenn.; New Orleans, La.; Peoria, Ill.; Philadelphia, Pa.; Pittsburgh, Pa.; St. Louis, Mo.; Salt Lake City, Utah; Seattle, Wash.

Carolina Portland Cement Co., New Orleans, La.

Chatfield Mfg. Co., Cincinnati, O.

Cleveland-Cliffs Iron Co., Cleveland, O.

Creosote Supply Co., 1105 Queen & Crescent Bldg., New Orleans, La.

Denver Gas and Electric Light Co., 900 15th St., Denver, Colo.

Lembcke, von Bernuth Co., 171 Madison Avenue, New York.

Lewis Mfg. Co., F. J., Chicago, Ill.; Birmingham, Ala.; Moline, Ill.

Nashville Chemical Co., Nashville, Tenn.

Republic Creosoting Co., Indianapolis, Ind.; Minneapolis, Minn.; Mobile, Ala.

Semet-Solvay Co., Syracuse, N. Y.

United Gas Improvement Co., Philadelphia, Pa.

Utah Light & Power Co., Ogden, Utah.

Warren Brothers, Cambridge, Mass.

Zopher Mills, 91 Pioneer St., Brooklyn, N. Y.

Foreign.

American Tar Products Co., Montreal, Canada.

Blagden, Waugh & Co., London, England.

British Creosote Co. (Shields & Ramsay, Agents), Glasgow, Scotland.

Brotherton & Co., Ltd., Leeds, England.

Burt, Bolton & Haywood, Ltd., London, England.

Chemische Fabrik Grunan, Grunan (Berlin), Germany.

Chemische Fabrik Ladenburg, Ladenburg, Germany.

Dominion Tar & Chemical Co., Sydney, Nova Scotia.

Dunn Bros. & Co., Manchester, England.

Forbes, Abbott & Leonard, London, England.

Gas Light & Coke Co., London, England.

Graesser, R., Ruabon, Wales.

Hird, Hastie & Co., Glasgow, Scotland.

Leitch & Co., John W., Heddersfield, England.

Creosote—(Continued).

Lowe & Co., Chas., London, England.

Major & Co., Hull, England.

Metcalf, J., Altham (Near Accrington), England.

Munro Co., Robt. A., Ltd., Glasgow, Scotland.

Page & Co., Chas., London, England.

Raschig, Dr. F., Ludwigshafen on Rhein, Germany.

South Metropolitan Gas Works, London, England.

Tennant & Co., Chas., London, England.

Tullock Co., Wm., Glasgow, Scotland.

Zinc Chloride.

Commercial Acid Co., St. Louis, Mo.

General Chemical Co., 112 W. Adams St., Chicago, Ill.

Grasselli Chemical Co., Cleveland, O.

Patented Proprietary Preservatives.

Aczol. J. Gerlache, Boulevard du Nord, 68, Brussels, Belgium.

Atlas "A." Atlas Preservative Co., New York.

Aztec. Interocean Oil Co., New York.

Avenarius Carbolineum. Carbolineum Wood Preserving Co., Milwaukee, Wis., New York.

Barol. Anthrol Wood Preserving Co., New York.

Barrett Grade One Liquid Creosote Oil (Carbosota). The Barrett Co., 17 Battery Place, New York; Birmingham, Ala.; Boston, Mass.; Chicago, Ill.; Cincinnati, O.; Cleveland, O.; Detroit, Mich.; Kansas City, Mo.; Louisville, Ky.; Minneapolis, Minn.; Nashville, Tenn.; New Orleans, La.; Peoria, Ill.; Philadelphia, Pa.; Pittsburgh, Pa.; St. Louis, Mo.; Salt Lake City, Utah; Seattle, Wash.

Beechwood Creosote. Lake Superior Iron and Chemical Co., Detroit, Mich.

B. M. Franz Workman, New York.

Carbolite Carbolineum. The Dominion Paving & Contracting Co., 55 Gore Vale Ave., Toronto, Ont.

Carbosota. The Barrett Co. (See above.)

C-A-Wood-Preserver. C-A-Wood-Preserver Co., Inc., St. Louis, Mo.

Chlorocene. Sherwin-Williams Co., Cleveland, O.

Concentrol. F. & H. Aldred, Derby, England.

Conservo. Samuel Cabot, Inc., Boston, Mass.

Copper Sulphate. American Smelting & Refining Co., New York. General Chemical Co., 112 W. Adams St., Chicago, Ill.

Copperized Oil. Copper Oil Products Co., New York.

Corrosive Sublimate. Roessler & Hasslacher Chemical Co., New York.

Cresol-Calcium. Blagden, Waugh & Co., London, England.

Eternoid. L. & M. Supply and Equipment Co., Trenton, N. J.

Ferrosote. National Wood Preserving & Lumber Co., Chicago, Ill. Grade One Liquid Creosote. The Barrett Co. (See above.)

Holz-Helfer. Vaughn Paint Co., Cleveland, O.

Kreodone. Republic Creosoting Co., Indianapolis, Ind.; Minneapolis, Minn.; Mobile, Ala.

Letteney. The Northeastern Co., 6 Beacon St., Boston, Mass.

Locustine. W. H. Huff, Beverly, N. J.

Montanin. Montanin Co., New York.

Mykantin. Farbwerke Hoechst Co., San Francisco, Cal.

Para-Kresol. American Chemical & Textile Co., Wilmington, N. C.

Penetin. Preservative Materials Co., New York.

Preservol. Newbold Mfg. Co., 135 Greenwich St., New York.

Pyrolin. Pyrolin Products Co., Inc., Fort Dodge, Iowa.

Reeves' Wood-Preserver. The Reeves Co., New Orleans, La.

Sapwood Antiseptic. J. W. Long, Chicago, Ill.

Saum's Preservative. Geo. W. Saums Co., Trenton, N. J.

Sodium Fluoride. General Chemical Co., Pittsburgh, Pa. Harshaw, Fuller & Goodwin Co., Cleveland, O.

Sodium Silicate. General Chemical Co., 112 W. Adams St., Chicago, III.

Solignum. The Northeastern Company, Boston, Mass.

S. P. F. Carbolineum. S. P. F. Wood-Preserving Co., New York.

Spirittine. Spirittine Chemical Co., Wilmington, N. C.

Timberasphalt. Indian Refining Co., New York.

Zinc Sulphate. General Chemical Co., 112 W. Adams St., Chicago, Ill. Grasselli Chemical Co., Cleveland, O.

Pavements of preserved wood are pavements of permanent worth.

USES OF PRESERVED WOOD.

Wood has many advantages over its substitutes; namely: Wood is widely distributed and easily obtainable.

Wood can be worked easily into any shape with simple tools.

Wood is strong, tough, elastic and noiseless.

Wood will not contract or expand under varying temperatures.

Wood is a non-conductor of heat and electricity.

Wood used in structures or for other purposes can be more easily removed and used over again than equallysubstantial material.

Preservative treatment gives to wood the additional advantage of durability wherever decay is a factor in its service.

The principal uses of treated wood are:

Cross-Ties.
Switch-Ties.
Bridge-Ties.
Structural Timbers.
Piles

Fence Posts.
Blocks for Paving
and Flooring.
Miscellaneous Lumber.

Cross-Arms.

Poles.

One-third of all the railway ties used annually are now treated with preservatives, and the consumption of treated wood for railway work is steadily increasing.

Treated telegraph and telephone poles and cross-arms are now the rule rather than the exception. Only creosoted piles will withstand the attack of marine borers, and in consequence untreated wood is now rarely found in wharf supports.

Streets paved with wood blocks are no longer uncommon. Their growing popularity is justified by their wearability, noiselessness, dust-lessness, etc.

As flooring, wood block is used in:

Foundries.
Machine Shops (all kinds).
Shops Handling Heavy Machinery.
Railway Shops.
Railway Stations.
Warehouses.
Factories.
Factory Courts.
Freight Houses.
Express Rooms.
Baggage Rooms.
Wild Animal Cages,
Runways, etc.

Ferryboats and Approaches.
Driveways.
Bridges.
Post Offices.
Dumping Platforms.
Freight Platforms.
Loading Platforms.
Station Platforms.
Wharves and Docks.
Barns.
Tennis Courts.
Stables.
Slaughter Houses.

Rubber Factories.
Hospitals.
Laundries.
Printing Establishments.
Garages.
Cotton Mills.
Paper Mills.
Kitchens.
Bakeries.
Engine Houses.
Milk Depots.
Breweries.

Dairies.

Satisfied users replied as follows when asked why they preferred wood block as flooring:

Wears well; durable; long life.

Easy on feet of workmen; men like to work on these floors.

Quiet; noiseless. Easily repaired.

Low upkeep cost.

Smooth, easy trucking; good surface. Good footing. Not slippery.

Saves tools dropped, castings, fine work, materials, kegs, etc.

Sanitary.

Warm.

Dustless; clean.

Easily cleaned.

Resilient, pliable, shock absorber.

Easy on mules and horses.

Easy to move or set up machinery on, to put in pipes, etc.

Saves trucks.

Non-inflammable.

Stands great abuse.

Dries quickly; waterproof. Makes a solid floor.

Non-absorbent.

Does not crack or chip when heavy castings are thrown on floor.

Makes a neat floor.

Keeps a neat floor.

Keeps out flies, mosquitoes, etc.

Not damaged by metal grinding into the floor.

Easily laid.

Preserved structural timbers and miscellaneous lumber are used for numerous purposes about the farm, in silos, barns, stock pens, chicken coops, fencing, culverts, etc.; about mills, as sills, posts, rafters, conduits, etc.; in mines, as supports, etc.

Preserved piles are practically permanent.

MANUFACTURERS OF WOOD-PRESERVING EQUIPMENT.

	3.514 4 3371
Allis-Chalmers Mfg. Co	
Brown Hoisting Machinery Co	
Bovaird & Seyfaud Mfg. Co	Bradford, Pa.
Casey & Hedges	.Chattanooga, Tenn.
Chicago Bridge & Iron Co	
Crane Co	Chicago, Ill.
Coeur d'Alene Iron Works	
Crook, Kries & Co., (Successors to T. C. Basshor	Co.), Baltimore, Md.
Fairbanks-Morse Co	St. Paul, Minn.
Fexboro Co., The	
Graver Tank Works, Wm	
Gravier Tank Works	Galveston, Tex.
Greenlee Bros. & Co	Rockford, Ill.
Hilke Stacker Co	
International Creosoting & Construction Co	
Jacobs & Sons, S	•
Lakewood Engineering Co	0 ,
Logan Iron Works	•
Manitowoc Engineering Works	
Mathews Gravity Carrier Co	
Mohr & Sons, John	
Moran Bros.	
National Boiler & Sheet Iron Works	
Orenstein-Arthur Koppel Co	
Payne & Joubert	· ·
Petroleum Iron Works	
Reeves Bros. Co	
Schaeffer & Budenberg Mfg. Co	
Struther-Wells Co	
Taylor Instrument Companies.	
Union Iron Works	
Willamette Iron and Steel Works	•
Worthington Pump and Machinery Corporation	
Yeomans Bros. Co	
Teomana Dios. Co	

Treated ties typify tip-top track.

USERS OF PRESERVED WOOD.

With a wider knowledge of the merits of treated wood for many purposes, and its greater economy as compared with the natural product, has come a more liberal demand for treated wood, especially from the larger users of this material. To name every user of treated wood would be quite a task, but it is possible to give some idea of the industries that absorb the increasing supply, as mentioned below:

Treated Cross-Ties, Switch-Ties and Bridge Ties.

Railroad companies.

Treated Structural Timbers.

Manufacturing companies.
Mining companies.
Railroad companies.
Agriculturists.

Treated Piles.

Railroad companies. Shipbuilding companies. Dock companies. U. S. Government. Municipalities.

Treated Poles and Cross-Arms.

Telegraph companies.
Telephone companies.
Railroad companies.
Light companies.
Power companies.
Water supply companies.

Treated Fence Posts.

Railroad companies. Agriculturists.

Treated Miscellaneous Lumber.

Railroad companies. Agriculturists. Shipbuilding companies.

Treated Wood Blocks.

Railroad companies.
Express companies.
Express companies.
Manufacturing companies.
Foundries.
Machine shops.
Post offices.
Garages.
Dock companies.
Shipbuilding companies.
Cotton mills.
Paper mills.
Slaughter houses.
Stables.
Platforms.

Hospitals.
Print shops.
Laundries.
Hotels and restaurants.
Bakeries.
Dairies.
Warehouses.
Stores.
Engine houses.
Breweries.
Rubber works.
Menageries.
Freight houses,

Barns.

WOOD-PRESERVING PLANTS, UNITED STATES, CANADA AND MEXICO.

PRESSURE PROCESSES.
UNITED STATES.

	UNITED S	IAILS.				
		Location		R	ETOR	ts
Managing Company	Headquarters	of			1	
		Plant	Year Built	No.	Diam. In	Length Ft.
American Creosoting Co.	New York, N. Y.	Newark, N. J.	1906	} 1 1	78 78	105 165
46 46 46 .	Louisville, Ky.	Indianapolis, Ind.	1913	2	64	134
66 66 66 66 66 66		Marion, Ill.	1907	2	84	134
4 4 4	" "	Springfield, Mo.	1907	2	84	134
** ** **		Kansas City, Mo.	1907	2	84	134
** ** **		Russell, Ky.	1915	1	84	134
	1	Hugo, Okla.	1907	2	84	134
American Creosote Works.	New Orleans, La.	Southport, nr. New Orleans	1901	{ 1 1	84 108	172 172
		Louisville, Miss.	1912	1	108	172
Anaconda Copper Mining Co.	Butte, Mont.	Butte, Mont.	1910	1	72	43
A. T. & S. F. Rwy. Co.	Topeka, Kan.	Somerville, Tex.	1906	5	74	132
		Albuquerque, N. M.	1908	2	74	132
Atlantic Coast Line R. R. Co.	Wilmington, N. C.	Gainesville, Fla.	1912	2	74	138
Atlantic Creo. & W. P. Wks.	Norfolk, Va.	Norfolk, Va.	1901	$\begin{cases} 1\\1\\1\end{cases}$	78 78 78	62 82 126
Ayer & Lord Tie Co.	Chicago, Ill.	Grenada, Miss.	1904	4	74	128
# # # #	" "	Argenta, Ark.	1907	4	74	132
44 44 44	44 44			(4	72	122
<i></i>		Carbondale, Ill.	1902	} 4	74	132
Baltimore & Ohio R. R. Co.	Baltimore, Md.	Green Spring, W. Va.	1912	2	84	132
Barber Asphalt Paving Co.	Maurer, N. J.	Maurer, N. J.	1905	4	72	115
Boston Elevated Rwy. Co. Buffalo, Rochester & Pitsburgh	Boston, Mass.	South Boston, Mass.	1916	1	90	51
R. R. Co.	Rochester, N. Y.	Bradford, Pa.	1910	1	75	95
Bunker Hill & Sullivan Mg. Co.	Kellogg, Idaho	Kellogg, Idaho	1908	1	84	10
Carbolineum Wood Pres. Co.	Portland, Ore.	Portland, Ore.	1901	1	• •	• • •
Central of Ga. R. R. Co.	Macon, Ga.	Macon, Ga.	1912	2	84	116
Central R. R. of New Jersey.	Port Reading, N. J.	Port Reading, N. J.	1912	2	88	140
Charlotte Harbor & No. Ry. Co.		Hull, Fla.	1912	1	74	
C. B. & Q. R. R. Co.	Galesburg, Ill.	Galesburg, Ill.	1907	5	74	132
4 4	Chicago, Ill.	Sheridan, Wyo.	1899	2		132
Chicago Creosoting Co.	Chicago, Ill.	Waukegan, Ill.	1907	2		134
66 66 66		Terre Haute, Ind.	1912	2	132	
Chicago & N. W. Ry. Co.		Escanaba, Mich.	1903	3	72	112
	,	Riverton, Wyo.	1915	1	72	110
Colman Co., J. M.	Seattle, Wash.	Seattle, Wash.	1884	3	1	120
Colonial Creosoting Co.	Louisville, Ky.	Bogalusa, La.	1912	2	72	134
Columbia Creosoting Co.	Portland, Oregon	Linnton, nr. P'tland, Ore.	1912	1 1	–	
Compressed Wood Preserving Co. Continental Tie & Lbr. Co.	Cincinnati, O. Denver, Colo.	Cincinnati, O. Cimarron, N. M.	1909 1913	2 1	72 84	
El Paso & S. W. R. R. Co. Eppinger & Russell Co.	El Paso, Tex. New York, N. Y.	Alamogordo, N. M. Long Island City, N. Y.	1902 1878	2 4	72 72	106 100

WOOD-PRESERVING PLANTS IN UNITED STATES—(Continued).

•		Location		Retorts		
Managing Company	Headquarters	of			ſ .	.4
	•	Plant	Year Built	No.	Diam. In	Length
Eppinger & Russell Co.	New York, N. Y.	Jacksonville, Fla.	1909	3	84	130
Federal Creosoting Co.	Louisville, Ky.	Bound Brook, N. J.	1909	1	84	150
	" "	Toledo, O.	1909	3	84	134
ee ee ee		Rome, N. Y.	1910	2	84	150
46 46 66	" "	Paterson, N. J.	1909	1	84	150
Georgia Creosoting Co.	Louisville, Ky.	Brunswick, Ga.	1915	2	84	121
Great Northern Ry. Co.	St. Paul, Minn.	Somers, Mont.	1901	4	72	110
Gulfport Creosoting Co.	Gulfport, Miss.	Gulfport, Miss.	1906	2	84	120
Indiana Creosoting Co.	Louisville, Ky.	Bloomington, Ind.	1907	1	84	134
Indiana Tie Co.	Evansville, Ind.	Evansville, Ind.	1907	2.	72	110
" "	Evansville, Ind.	Joppa, Ill.	1909	2	72	110
Indiana Zinc Creosoting Co.	Terre Haute, Ind.	Terre Haute, Ind.	1904	2	72	120
Interstate Public Service Co.	Indianapolis, Ind.	Columbus, Ind.	1909	. 1	72	45
Int'l. Creo. & Con. Co.	Galveston, Tex.	Beaumont, Tex.	1892 1897	{ 1	108	140
66 66 66		Galveston, Tex.	1905	1	72	100
		Texarkana, Ark.	1902	} 1 1	114	165
ec es es es		Texarkalla, Ark.	1702		72	125
Jennison-Wright Co.	Toledo, O.	Toledo, O.	1910	2	72	130
Kettle River Co.	Minneapolis, Minn.	Madison, Ill.	1909	4	84	135
cc 44 cc	" "	Sandstone, Minn.	1904	2	72	120
Louisiana Creosoting Co.	Winnfield, La.	Winnfield, La.	1906	} 1 } 1	72	126 80
L. & N. R. R. Co.	Louisville, Ky.	Guthrie, Ky.	1913	2	84	133
		(1895	1	72	115
	** **	Gautier, Miss.	1916	} 1 1	84	133 133
Michigan Pipe Co.	Bay City, Mich.	Bay City, Mich.	1893	1	72	42
Michigan Wood Preserving Co.	Pittsburgh, Pa.	Reed City, Mich.	1913	1	90	90
Mo., Kan & Tex. Ry. Co.	St. Louis, Mo.	Dennison, Tex.	1909	4	72	108
Moss Tie Co., T. J.		Mt. Vernon, Ill.	1899	} 1 1	74 72	132 117
Nat'l Lbr. & Creo. Co.	Texarkana, Ark.	Texarkana, Tex.	1910	2	84	132
Wat I LDF. & Creo. Co.	" "	Houston, Tex.	1912	4	72	120
			1896	4	78	100
Norfolk Creosoting Co.	Norfolk, Va.	Buell (nr. Norfolk), Va.	1905	{ 1 1	78 84	105
Northern Pacific Ry. Co.	St. Paul, Minn.	Brainerd, Minn.	1907	2	84	134
Ohio Wood Preserving Co.	Pittsburgh, Pa.	Orrville, O.	1912	1	84	90
Oregon-Wash. R. R. & Nav. Co.		Wyeth, Oregon	1904	4	72	114
Pacific Creosoting Co.	Seattle, Wash.	Eagle Harbor, Wash.	1906	8	73	125
Pennsylvania R. R. Co.	Philadelphia, Pa.	Mount Union, Pa.	1910	2	72	132
		Greenwich, Phila., Pa.	1909	1	72	132
Phila. & Reading Ry.	Port Reading, N. J.	Port Reading, N. J.	1912	2	88	140

WOOD-PRESERVING PLANTS IN UNITED STATES—(Concluded).

	•	Location		RETORTS		
Managing Company	Hea dquarters	of Plant	Year Built	No.	Diam. In.	Length
Pioneer Lbr. & Creo. Co.	Ensley, Ala.	Ensley, Ala.	1911	1	74	7
Pittsburgh Wood Preserving Co.	Pittsburgh, Pa.	Adelaide, Pa.	1911	1	84	9
Puget Sound Wd. Pres. Co.	Lowell, Wash.	Lowell, Wash.	1895	{ 1 1 1	84 72 72	11 8 5
Republic Creosoting Co.	Indianapolis, Ind.	Mobile, Ala.	1906	2	74	13
44 44 44	" "	Indianapolis, Ind.	1903	1	74	13
u u u	" "	Seattle, Wash.	1916	1	74	13
ee ee ee	Minneapolis Minn.	Minneapolis, Minn.	1905	2	74	13
St. Helens Creosoting Co.	Portland, Oregon	St. Helens, Oregon	1912	4	84	13
St. Paul & Tacoma Lbr. Co.	Tacoma, Wash.	Tacoma, Wash.	1912	1	84	13
Shreveport Creosoting Co.	Louisville, Ky.	Shreveport, La.	1910	2	84	13
Southern Creosoting Co.	Slidell, La.	Slidell, La.	1879 1902	1 2	84	15
Southern Pacific Co.	San Francisco, Cal.	Latham, Oregon	1893	2	72	11
southern racine Co.	44 44	West Oakland, Cal.	1887	} 1 1	72 72	10
44 46 46		Los Angeles, Cal.	1907	2	72	11
Southern Paving & Const. Co.	Chattanooga, Tenn.	Pensacola, Fla.	1912	1	72	9
Southern Wood Pres. Co.	Atlanta, Ga.	Atlanta, Ga.	1908	1	72	10
S. P. L. A. & S. L. R. R. Co.	Los Angeles, Cal.	San Pedro, Cal.	1908	2	72	1:
Tenn. C. I. & R. R. Co.	Birmingham, Ala.	McAdory, Ala.	1909	1	72	1
Texas & N. O. R. R. Co.	Houston, Tex.	Houston, Tex.	1890	5	72	1
Union Pacific R. R. Co.	Omaha, Neb.	Topeka, Kan.	1909	2	73	1
4 4 4	" "	Laramie, Wyo.	1903	2	73	1
U. S. Wood Preserving Co.	New York, N. Y.	Buell (near Norfolk), Va.	1907	2	78	1
Western Wood Pres. Co.	Spokane, Wash.	Yardley, Wash.	1912	1	84	١,
Wyckoff Pipe & Creo. Co.	New York, N. Y.	Portsmouth, Va.	1881	4		10
Watkins Creosoting Co.	Chicago, Ill.	Metropolis, Ill.	1913	1	74	1

CANADA.

Bruce & Co., Alex.	Glasgow, Scotland	Fort Francis, Ont.	1912	1	84	76
Canada Creosoting Co., Ltd.	Toronto, Ont.	Trenton, Ont.	1913	1	84	134
Dominion Creo. Co., Ltd. Dominion Tar & Chem. Co.	Vancouver, B. C. Sydney, N. S.	Vancouver, B. C. Sydney, N. S.	1910 1911	2	90 78	100 85
	" "	Transcona (nr. Winnipeg), Manitoba	1912	{ 1 { 3	78 78	84 135
Vancouver Creosoting Co., Ltd.	Vancouver, B. C.	North Vancouver, B. C.	1916	2	84	132

MEXICO.

No data regarding treating plants in Mexico. The Mexican Central Railroad built a plant at Aguas Calientas, Mex., in 1901 to treat railroad ties with chloride of zinc. About the year 1907 the Madero Co. built a 2-retort plant at Madera, Chihuahua. Mex., to treat railroad ties with chloride of zinc.

⁽Corrected to Jan. 1, 1916.)

WOOD-PRESERVING PLANTS, UNITED STATES AND CANADA.

NON-PRESSURE PROCESSES.

UNITED STATES.

Managing Company	Headquarters	Location of			Tanks or Boilers
Managing Company	2200040011015	Plant	Year Built	No.	Size, Ft.
Allen & Son Co., Otis	Lowell, Mass.	Lowell, Mass.	1848	2	4x 8x50
	" "	Portsmouth, N. H.	1875	4	4x 8x50
Anaconda Copper Mg. Co.	Butte, Mont.	Butte, Mont.	1909	. 1	10x10x10
Barnes-Lindsey Mfg. Co. Baxter & Jordan	Portland, Oregon Los Angeles, Cal.	Portland, Oregon Los Angeles, Cal.	 1911		• • • • • • •
Carbolineum Treating & Pav. Co.	Spokane, Wash,	Spokane, Wash.	1910	1	3x 4x60
Carbolineum Wd. Pres. Co.	Portland, Oregon.	Portland, Oregon	1910	4	3x 4x60
Del. Lack. & West. R. R. Co.	Scranton, Pa.	Nanticoke, Pa.	1907	1	6 dia. x32
Homestake Mining Co.	Lead, S. D.	Lead, S. D.	1908	1	4 dia. x38
Milwaukee Ry. & Light Co.	Milwaukee, Wis.	Milwaukee, Wis.	1910		
Naugle Pole & Tie Co.	Chicago, Ill.	Chicago, Ill.	1912	2	5x 5x10
Page & Hill Co.	Minneapolis, Minn.	Minneapolis, Minn.	1911	4	6 dia. x11
Pacific Light & Power Co.	Los Angeles, Cal.	Los Angeles, Cal.	1912	۱. ا	
P. & R. Coal & Iron Co.	Pottsville, Pa.	New Philadelphia, Pa.	1908	1	6 dia. x32
Public Service Ry.	Newark, N. J.	Newark, N. J.	1909	1	10x32x 2
Puget Sound Wd. P. Co.	Lowell, Wash.	Lowell, Wash.	1895	. 1	3x10x30
Reeves Co., The	New Orleans, La.	New Orleans, La.	1915	1	3x 3x30
Reeves Co., The	New Oricans, Da.	New Orleans, La.	1910	, 1	4x 4x30
Republic Creosoting Co.	Mobile, Ala.	Mobile, Ala.	1912	1	3x19x10
San Joaquin L. & P. Co.	Fresno, Cal.	Fresno, Cal.	1910	2	7x 9x 9
	" "	San Miguel, Cal.	1910	1	7x 9x 9
St. Paul & Tacoma Lbr. Co.	Tacoma, Wash.	Tacoma, Wash.	1915	4	7×10×30
Southern Pacific Co.	San Francisco, Cal.	West Oakland, Cal.	1911	1	4x 6x 8
U. S. Govt. Wood Pres. Plant	Keokuk, Iowa	Keokuk, Iowa	1908	1	4x 3x42
	Milan. Ill.	Milan, Ill.	1908	1	4x 3x42
46 46 46 48	Stillwater, Minn.	Stillwater, Minn.	1908	1	4x 3x42
	Fountain City, Wis.	Fountain City, Wis.	1908	1	4x 3x42

CANADA.

Lindsley Bros.	Spokane, Wash.	Naskup, B. C.	1910	1	6 dia. x12
		,		_	

(Corrected to Jan. 1, 1916.)

AMERICAN WOOD-PRESERVERS' ASSOCIATION CONSTITUTION

(Amended 1912, 1915, 1916)

ARTICLE I.

Name and Objects.

SECTION 1. The name of this Association shall be the AMERICAN WOOD-PRESERVERS' ASSOCIATION.

Section 2. The objects of the Association shall be the promotion of knowledge of the materials, methods, and principles involved in the economic design, location, construction, maintenance, and operation of wood-preserving works; the standardization of specifications for wood preservatives and for their introduction into the material to be preserved; and the maintenance of high standards of business ethics in the wood-preserving industry.

Section 3. The means to be used for these purposes shall be meetings for the presentation and discussion of reports of the experiences and investigations of its members and others, for the interchange of ideas, and for social intercourse; the publication of desirable information; and co-operation with organizations or individuals in work affecting wood-preserving.

ARTICLE II.

Membership.

SECTION 1. The Association shall consist of Corporate, Associate, Probate, and Honorary members.

Section 2. A Corporate Member shall be an executive, an administrator, or an operative in a wood-preserving organization; an officer of a public-utility corporation using treated wood whose duties cover the purchasing, inspecting, treating, or distribution of such material; a chemist or an engineer in the employ of a city, county, state, nation, or public-utility corporation; a consulting chemical, civil, electrical, forest, or mechanical engineer; or a professor or an instructor in an institution of learning.

SECTION 3. An Associate Member shall be any person or association of persons interested in wood preservation or in the sale of material or equipment used in the wood-preserving industry.

SECTION 4. A Probate Member shall be an employe of a wood-preserving or inspecting organization who is not eligible for Corporate Membership.

SECTION 5. An Honorary Member shall be a person of acknowledged eminence in the wood-preserving industry or the sciences relating thereto. The number of Honorary Members shall not exceed five.

- Section 6. Corporate Members shall have all the rights and privileges of the Association.
- Section 7. Associate Members shall have all the rights of Corporate Members, except those of voting or holding office.
- SECTION 8. Probate Members shall have all the rights of Corporate Members, except those of voting or holding office, for five years from the date of their admission, when their status shall be determined by the Executive Committee.
- SECTION 9. Honorary Members shall have all the rights of Corporate Members, except that of holding office, and shall be exempt from the payment of dues.

ARTICLE III.

Admissions and Expulsions.

- SECTION 1. Applications for membership and resignations from membership shall be transmitted to the Secretary-Treasurer, the former on a form prescribed by the Executive Committee and endorsed by a Corporate or an Honorary Member. The Secretary-Treasurer shall forward a copy of each application for membership to each member of the Executive Committee, the affirmative votes of a majority of whom shall admit the candidate.
- SECTION 2. Proposals for Honorary Membership shall be made by at least ten members, none of whom shall be a member of the Executive Committee. The nominee shall be declared an Honorary Member if he receives the unanimous vote of the Executive Committee or the votes of two-thirds of the Corporate and Honorary members.
- SECTION 3. Any member of the Association who resigns while in good standing may be reinstated without paying a second admission fee, provided his application is approved by two-thirds of the Executive Committee.
- Section 4. For unbecoming conduct a member may be expelled by the votes of two-thirds of the members at an Annual Meeting, after the member has been served with written particulars as to his offense by the Executive Committee, and had an opportunity to be heard by it or by the members at an Annual Meeting.
- SECTION 5. The Executive Committee shall accept the resignation, tendered in writing, of any member whose dues are paid.

ARTICLE IV.

Dues.

SECTION 1. On admission to the Association, members shall pay fees as follows: Corporate Members, \$10.00; Associate Members, \$15.00; Probate Members, \$5.00, which shall include their first dues.

- SECTION 2. The annual dues, payable during the first two months of the calendar year, shall be as follows: Corporate Members, \$10.00; Associate Members, \$10.00; Probate Members, \$5.00.
- Section 3. Members admitted after March 31 shall be exempt from the payment of dues until the following January 1, unless they desire to vote or to receive the current publications of the Association, in which case they shall pay one-half of the annual dues.
- SECTION 4. Any member whose dues are unpaid on April 1 shall not receive the publications of the Association, and if his dues are not paid by December 31, his membership shall be canceled, except as provided for in Section 5 of this Article.
- Section 5. The Executive Committee may extend the time for paying or remit the dues of any Corporate or Probate members who are unable to pay them.

ARTICLE V.

Officers.

- SECTION 1. The officers of the Association shall be Corporate Members and shall consist of a President, a First Vice-President, a Second Vice-President, a Secretary-Treasurer, and six Members of Executive Committee, who, together with the last Past-President who is a Corporate Member, shall constitute the Executive Committee in which responsibility for the government of the Association shall be vested. The President shall be chosen from the nine eligible members of the Executive Committee.
- SECTION 2. No two or more officers in any year shall be members of the same business organization.
- SECTION 3. The President, the First Vice-President, the Second Vice-President, the Secretary-Treasurer, and two Members of Executive Committee shall be elected at each Annual Meeting.
- SECTION 4. The terms of the President, Vice-Presidents, and Secretary-Treasurer shall begin at the close of the Annual Meeting at which they are elected and continue until their successors are elected and have qualified. The six Members of Executive Committee shall serve three years, two being elected each year.
- SECTION 5. A vacancy in the office of President shall be filled by the Vice-Presidents in order.
- SECTION 6. A vacancy in any office other than that of President shall be filled by an appointee of the Executive Committee.
- SECTION 7. The President shall not be eligible for re-election to that office until three others have filled it. A Vice-President shall not be eligible for re-election to the same office until one other has filled it.

ARTICLE VI.

Nomination and Election of Officers.

- SECTION 1. At each Annual Meeting six Corporate Members who are not officers shall be elected, together with the three last Past-Presidents who are Corporate Members, to serve one year as a Nominating Committee, of which the senior Past-President shall be chairman.
- Section 2. The Nominating Committee shall nominate one eligible member for each office and for each membership in the Nominating Committee and shall send its list of nominees to the Secretary-Treasurer before October 15. Any vacancies that may occur in the list of nominees before it is sent to the members shall be filled by the Executive Committee.
- SECTION 3. The voting shall not be restricted to the names presented by the Nominating Committee. Any member may file with the Secretary-Treasurer before November 1 the name of a candidate for any office.
- Section 4. The ballot, with envelopes for secret voting, shall be sent to each member before December 1. It must contain the names of all nominees for each office, arranged alphabetically where there is more than one name for any office, with the nominees of the Nominating Committee plainly indicated.
- SECTION 5. Members may scratch or substitute the name of any nominee for any office.
- Section 6. Ballots shall be sealed and sent or delivered to the Secretary-Treasurer before the polls close, prior to which time a voter may withdraw or replace his ballot.
- Section 7. The polls shall be closed at noon on the first day of the Annual Meeting, and the ballots shall be counted by one Corporate and four Associate or Probate Members, appointed tellers by the presiding officer at the Annual Meeting.
- SECTION 8. The persons who receive the highest number of votes for the offices for which they are candidates shall be declared elected. In case of a tie between candidates for the same office, the members present at the Annual Meeting shall elect the officer from the candidates so tied. The presiding officer shall announce to the meeting the names of the officers elected.

ARTICLE VII.

Management.

Section 1. The President shall have general supervision of the affairs of the Association, shall preside at its meetings and those of the Executive Committee, and shall be a member ex-officio of every committee except the Nominating Committee.

- SECTION 2. The Vice-Presidents, in order of seniority, shall preside at meetings in the absence of the President, and discharge his duties in case of a vacancy in the office.
- Section 3. The Secretary-Treasurer, under the direction of the President and the Executive Committee, shall be the executive officer of the Association. He shall conduct the correspondence of the Association; record the proceedings of all meetings; collect and deposit all moneys due the Association; verify all bills and pay them when approved by the President or Executive Committee; make at each Annual Meeting a report of the accounts and membership of the Association; and perform such other duties as may be assigned to him by the Executive Committee.
- SECTION 4. The Executive Committee shall manage the affairs of the Association, and shall have full power to control and regulate all matters not provided for in the Constitution. It shall act on applications for membership; make appropriations for specific purposes; direct the care of the surplus funds of the Association; and audit the accounts of the Secretary-Treasurer.
- SECTION 5. The Executive Committee shall publish the activities of the Association in a book to be known as the Annual Proceedings; but, subject to the action of the Association, it may withhold, in whole or in part, discussions, papers, or reports, the propriety or soundness of which it considers questionable.
- Section 6. The Executive Committee shall have printed a Manual of Recommended Practice, in which shall be published the specifications and standards approved by the Association in accordance with Article X.
- SECTION 7. The Executive Committee shall meet at such times and places as the President may direct, or five members may request in writing. Six members shall constitute a quorum.

ARTICLE VIII.

Meetings.

- Section 1. An Annual Meeting, at which the officers shall be elected and all annual reports read, shall be held on the fourth Tuesday in January of each year, at ten o'clock A. M., at such place as the Association at the previous meeting may designate.
- Section 2. Whenever the President may deem it necessary, or upon the written application of fifteen Corporate Members, he shall direct the Secretary-Treasurer to call a special meeting. The call for such a meeting shall state the time, place, and purpose of the meeting, and shall be mailed not less than thirty days prior to the date of the proposed meeting.

SECTION 3. Twenty Corporate Members shall constitute a quorum at any meeting of the Association.

Section 4. The order of business at the meetings of the Association shall be arranged by the Executive Committee, subject to addition or change by the votes of the majority of the members present.

ARTICLE IX.

Amendments.

SECTION 1. Proposed amendments to this Constitution must be offered in writing, signed by at least five Corporate Members, and forwarded to the Secretary-Treasurer not less than thirty days prior to the Annual Meeting. They shall be published with the notices for the meeting.

Section 2. Proposed amendments shall be in order for discussion at the Annual Meeting, and may be amended and adopted if two-thirds of the votes of the Corporate and Honorary members present and voting are affirmative.

ARTICLE X.

Adoption of Standards.

Section 1. Any proposals for the approval or recommendation by the Association, of definitions, methods, nomenclature, specifications, standard construction, or standard practice, or aimed at defining formally the position of the Association on any matter of importance, shall be presented in writing, with drawings if necessary, at an Annual Meeting. At this meeting amendments may be made by a majority of the Corporate and Honorary members present and voting. Proposed standards shall be referred to letter ballot of the Association if two-thirds of the Corporate and Honorary members at an Annual Meeting vote affirmatively. The affirmative votes of two-thirds of all the Corporate and Honorary members shall be required for the adoption of any standard.

AMERICAN WOOD-PRESERVERS' ASSOCIATION OFFICERS AND COMMITTEES

OFFICERS FOR 1916.

Carl G. Crawford	President
John FoleyFirst	Vice-President
M. K. TrumbullSecond	Vice-President
F. J. Angier Secretary-Treasurer, Mt. Royal Station, I	Baltimore, Md.

EXECUTIVE COMMITTEE.

	Carl G. (Crawford, Chairman	
Angier, F. J.		Davidson, G. M. }	Term. 2 Years
Foley, John			
Trumbull, M. K.		Card, J. B.	W 1 W
Joyce, A. R. Pooler, F. S.	Term, 3 Years	Hendricks, V. K. Waterman, J. H.	1erm, 1 Year
rooler, r. S.		waterman, J. M.	,

STANDING COMMITTEES FOR 1916.

No. 1-Preservatives.

Church, S. R.	Fulweiler, W. H. Kammerer, A, L. Larkin, A. E.	Steinmayer, O. C. Taylor, C. M.
---------------	--	------------------------------------

No. 2-Specifications for the Purchase and Preservation of Treatable Timber

Card, J. B. Goss, O P. M.	A. R. Joyce, <i>Chairman</i> Martin, F. R. Rex, Geo. E. Winslow, C. P.	Smith, Lowry Sterling, E. A.
Card, J. B. Goss, O P. M.	Rex, Geo. E.	

No. 3-Wood Block Paving.

Buehler, Walter Cherrington, F. W.	Hamilton, F. P. Loud, H. S.	Newton, H. M.
Cherrington, r. w.	Loua, H. S.	

No. 4-Plant Operation.

Hunt, Geo Lane, C.	. M.	Lockett, A. M. McArdle, Frank	Meyer,	August

No. 5-Service Tests of Ties and Structural Timber.

Bowser, E. H.	C. I	P. Winsle Gosline,	w, Chairman	Rollins	, н. м.
Bowser, E. H. Ford, C. F.		Mattos,	F. D.	von S	chrenk, Hermann

No. 6—Service Tests of Wood Block Paving.

	L. B. Moses, Chairman	
Calder, R. J.	Dutton, F. R.	Williams, J. C. Winslow, Geoffrey
Dow, Allan W. Draper, E. G.	Manley, R. S. Smith, Phil R.	Winslow, Geoffrey
Diapei, E. G.	Simili, Thu K.	

SPECIAL COMMITTEES FOR 1916.

Publicity Promotion and Education

Publici	ty, Promotion and Educa	LUOII.
Bates, John S. Brown, Nelson C. Hamilton, F. P.	E. A. Sterling, Chairman Howson, E. T. Record, Samuel J. Ridsdale, P. S.	Schnatterbeck, C. C. Swan, O. T.
	Terminology.	
Howson, E. T.	J. B. Card, Chairman Hunt, Geo. M. Trumbull, M. K.	Shipley, G. B.
	Program.	
Davidson, G. M.	John Foley, Chairman Hendricks, V. K. Trumbull, M. K.	Joyce, A. R.
	Entertainment.	

Jesse I. Eppinger, Chairman Loud, H. S. Shipley, L. B. Draper, E. G. Lembcke, G. A. Williams, J. C.

AMERICAN WOOD-PRESERVERS' ASSOCIATION MEMBERS

c-Corporate. a-Associate. p-Probate. h-Honorary. Figures indicate serial number of Membership Certificates.

324 c	ACREE, S. FIn Charge Section of Derived Products, Forest Product Laboratory, Madison Wis.
183 c	ALEXANDER, E. EGeneral Foreman, Timber Preserving Plant, Baltimore and Ohio R. R. Co., Green Spring, W. Va.
29 c	ALLARDYCE, R. LSupt., International Creosoting & Construction Co., Texarkana, Tex.
21 c	ALLERTON, DAVIDCarlotta, Cal.
1 c	ANGIER, F. JSupt. of Timber Preservation, Baltimore and Ohio R. R. Co., Baltimore, Md.
274 c	APPEL, HARRIS A Engineer, Bruno Grosche & Co., 90 Wall Street, N. Y.
2 c	ARMSTRONG, R. L636 Burdette St., New Orleans, La.
105 с	BACON, W. LSupt. Tie Treating Plant, C. & N. W. Ry., Escanaba, Mich.
225 c	BAKER, HUGH PDean, New York State College of Forestry, Syracuse, N. Y.
223 C	BAKER, J. SBox 22, Paducah, Ky.
167 c	BATEMAN, ERNESTChemist, Forest Products Laboratory, Madison, Wis.
246 с	BATES, JOHN SSupt., Forest Products Laboratories, McGill University, Montreal, Canada.
88 c	BATSON, C. DManager, Republic Creosoting Co., Mobile, Ala.
4 c	BEAL, F. DSales Engineer, Chas. R. McCormick & Co., 800 Fife Bldg., San Francisco, Cal.
255 c	BEATY, R. ERNESTExpert on Wood Preservation, 30 Church St., New York.
198 c	BECKER, A. C
295 a	BELANGER, ERNESTConsulting Engineer, Elder Ebano Asphalt Co., 364 University St., Montreal, Canada.
145 c	BELCHER, R. SSupt. Treating Plant, Santa Fe Tie & Lumber Pres. Co., Somerville, Tex.
144 c	BERK, P. F
5 h	BERRY, C. W
300 c	BLACK, JAMES MPaving Block Expert, 203 Pasadena Apts., Jefferson & Du Bois Sts., Detroit, Mich.
22 c	BOEHNE, E. EOffice Manager, International Creosoting & Construction Co., Galveston, Tex.
258 c	BOOK, J. ETreating Engineer, Pacific Creosoting Co., Creosote, Wash.
244 c	BOWSER, E. HSupt. of Timber Department, I. C. R. R., Memphis, Tenn.
267 a	BOYD, J. L
280 p	BRENNAN, T. SLumber Inspector, A., T. & S. F. Ry., Box 503, Ballard Station, Seattle, Wash.
301 c	BRIGHT, EDGAR WTie & Timber Agent, Boston Elevated Rwy. Co., 101 Milk St., Boston, Mass.
340 c	BROWN, F. I Lumber Agent, Pennsylvania Lines West, Fort Wayne, Ind.
230 с	BROWN, NELSON CProfessor of Forest Utilization, New York State College of Forestry, Syracuse, N. Y.
122 c	BRUNING, HEINRICH(Robert A. Munro & Co., 31 Liberty St., New York City) Hubertusmuhle, Schopfurth, Mark, Germany.
23 c	BUEHLER, WALTERConsulting Engineer on Wood Preservation, The Barrett Co., 10 S. La Salle St., Chicago, Ill.
24 c	BURKHALTER, DAmerican Creosoting Co., Box 77, Russell, Ky.
338 c	BURY, RICHARD A, Asst. Gen. Tie Agent, New York Central Lines, 76 Seward Ave., Detroit, Mich.
83 a	CABOT, SAMUELMfg. Chemist, 141 Milk St., Boston, Mass.
- 50 E	CALDER, R. JSecyTreas., International Creosoting & Construction Co.
·	Galveston, Tex.

	CAREED TO THE COLOR OF THE COLO
190 c	Chicago, Ill.
43 c	Chicago, Ill.
276 с	CECIL, WM. A
257 с	CHADBOURNE, BAsst. Supt., Pacific Creosoting Co., Creosote, Wash.
302 c	CHAPIN, E. TPrest., The E. T. Chapin Co., 2008 Railway Exchange Bldg., St. Louis, Mo.
69 c	CHERRINGTON, F. WChief Engr., Jennison-Wright Co., 313 Huron St., Toledo. O.
19 c	CHRISTIAN, EDMUNDGen. Mgr., Norfolk Creosoting Co., Norfolk, Va.
57 a	CHURCH, SUMNER R Manager, Research Dept., The Barrett Co., 17 Battery Place, New York.
165 с	CLARKE, G. S Vice-Prest. & Gen. Mgr., The Reeves Co., 809 Whitney- Central Bldg., New Orleans, La.
184 c	CLARK, W. DENNISON Vice-Prest. & Gen. Mgr., Columbia Creosoting Co., 810 Lewis Bldg., Portland, Ore.
318 c	CLEMENTS, A. B Vice-Prest., United States Wood Preserving Co., 165 Broadway, New York.
319 p	CLEMENTS, CYRIL M Sales Engineer, The Barrett Co., Philadelphia, Pa.
174 c	
249 c	CLIFTON, W. H Lumber Agent, Baltimore & Ohio R. R. Co., Baltimore, Md. COBEAN, CHAS. ESupt., Pacific Creosoting Co., Creosote, Wash.
188 a	COCKE, W. HPrest., Commercial Acid Co., 3943 Duncan Ave., St. Louis, Mo.
157 c	COLLIER, H. LChief of Construction, City of Atlanta, Ga.
218 c	COLLIVER, S. RTreatment Inspector, A., T. & S. F. Ry., Topeka, Kan.
67 c	COLMAN, GEO. AThe J. M. Colman Co., Colman Bldg., Seattle, Wash.
221 c	COOPER, S. DChief Inspector, A., T. & S. F. Ry., Topeka, Kan.
31 c	CRAWFORD, CARL GGen. Mgr., American Creosoting Co., 808 Columbia Bldg., Louisville, Ky.
80 c	CURTIS, W. WPrest. & Treas., The Rapson Coal Mining Co., Box 485, Colorado Springs, Colo.
25 с	DAVIDSON, G. MChemist & Engineer of Tests, C. & N. W. Ry. Co., Chicago, Ill.
143 c	DAVIES, E. TInspector, City Engineer's Office, Minneapolis, Minn.
84 c	DE CEW, J. A
272 c	DELIUS, E. ABookkeeper, Pacific Creosoting Co., Seattle, Wash.
204 с	DEMUTH, R. E Testing Engineer, 22 Hayward Ave., Baltimore, Md.
223 c	DIXON, G. CTie Treating Inspector, N. Y. C. Lines, Box 763, Indianapolis, Ind.
64 c	DIXON, J. HForestry Branch, Dept. Natural Resources, Canadian Pac. Ry., Calgary, Alberta, Canada.
119 с	DOUGHERTY, CURTISChief Engineer, Queen & Crescent R. R., Cincinnati, O.
303 c	DOVEY, J. THOMASPrest., The Seattle Engineering Co., 724 Central Building.
	Seattle, Wash.
290 c	DOW, ALLAN WConsulting Engineer, Dow & Smith, 131 E. 23rd St., N. Y.
121 c	DRAPER, E. GPrest., American Creosoting Co. of N. J., 17 Battery Place, New York.
166 a	DREFAHL, LOUIS C Chemist, Grasselli Chemical Co., 880 The Arcade, Cleveland, Ohio.
93 с	DRINKER, W. WAsst. Engineer, Erie R. R. Co., 50 Church St., New York.
178 c	DUNSTAN, J. HSupt., Southern Creosoting Co., Slidell, La.
211 c	DURHAM, J. HVice-Prest., American Creosoting Co., Louisville, Ky.
322 c	DUTTON, ELLIS RAsst. City Engr., City Hall, Minneapolis, Minn.
202 a	EASTWICK, CHAS. H Prest., The Northeastern Co., 6 Beacon St., Boston, Mass.
297 a	ELLIOTT, J. ATie & Timber Contractor, 1609 Mound Ave., Jacksonville, Ill.
275 c	EMERSON, HARRINGTONPrest., The Emerson Co., 30 Church St., New York.
76 c	EPPINGER, JESSE IGen. Mgr., Eppinger & Russell Co., 165 Broadway, New York.
163 c	ERICSON, L. TEngineer, American Creosoting Co. of N. J., 17 Battery Place,
	New York.

158 c FANT, A. E.....Gen. Mgr., Gulfport Creosoting Co., Gulfport, Miss.

9 h	FAULKNER, E. OMgr., Tie & Timber Dept., A., T. & S. F. Ry., Kerckhoff Bldg., Los Angeles, Cal.
159 a	FENN, FRANK DMgr., Railroad Sales Dept., The Crane Co., Chicago, Ill.
239 с	FERGUSSON, HUBERTGen. Mgr., Burt, Boulton & Haywood, Ltd., Prince Regent's Wharf, Silverton, Victoria Docks, London, England.
237 с	FINKE, W. F. HTie & Timber Agent, Southern Ry. Co., Washington, D. C.
62 c	FISHER, WM. ALembcke, von Bernuth Co., 171 Madison Ave., New York,
308 a	FOERSTERLING, DR. H Vice-Prest., Roessler & Hasslacher Chemical Co., 380 High St., Perth Amboy, N. J.
77 c	FOLEY, JOHNForester, P. R. R. Co., Broad St. Station, Philadelphia, Pa.
106 с	FORD, C. FSupt. Tie and Timber Dept., C., R. I. & P. R. R., 325 LaSalle St. Sta., Chicago, Ill.
296 с	FORREST, CHAS. NChief Chemist, Barber Asphalt Paying Co., Maurer, N. J.
313 c	FOWLER, J. WAsst. Efficiency Engineer, Baltimore & Ohio R. R. Co., Baltimore, Md.
117 c	FREY, GEO. WSecyTreas. & Mgr., Compressed Wood Preserving Co., 4600 Spring Grove Ave., Cincinnati, O.
333 с	FRISTOE, J. WPrest., T. J. Moss Tie Co., Security Bldg., St. Louis, Mo.
38 c	FULKS, E. BVice-Prest., American Tar Products Co., 208 S. LaSalle St., Chicago, Ill.
	FULWEILER, W. HChemist, United Gas Improvement Co., 1706 N. Broad St., Philadelphia, Pa.
306 a	FURLONG, L. AVice-Prest., The Valentine-Clark Co., Security Bldg., Minneapolis, Minn.
44 a	GERHARD, H. HPrest., C-A Wood-Preserver Co., 807 Wright Bldg., St. Louis, Mo.
39 c	GIBSON, ANDREW Engineer Maintenance of Way, No. Pac. Ry., St. Paul, Minn.
161 a	GIBSON, LOUIS SSecy., Sandoval Zinc Co., 410 N. Peoria St., Chicago, Ill.
180 a	GIBSON, W. CSales Engineer, Allis-Chalmers Mfg. Co., Milwaukee, Wis.
316 р	GOLDSTEIN, H. IHighway Inspector, Bureau of Highways, Dept. of Public Works, 4200 Woodland Ave., Philadelphia, Pa.
56 c	GOLTRA, W. FPrest., W. F. Goltra Tie Co., Rockefeller Bldg., Cleveland, O.
288 c	GOSLINE, C. ETreating Inspector, D., L. & W. R. R. Co., Paterson, N. J.
277 c	GOSS, O. P. MConsulting Timber Engineer, Seattle, Wash.
243 c	GRADY, W. HAsst. Gen. Supt., American Creosoting Co., Louisville, Ky.
100 c	GRAHAM, FLOYD NTimber Inspector, C. G. W. R. R. Chicago, Ill.
170 c	GREEN, DONALD W Secy., Columbia Creosoting Co., 809 Lewis Bldg., Portland, Ore.
232 с	GRIFFIN, RUSSELL AMgr. Pole Dept., Western Electric Co., 463 West St., New York.
334 c	GRIGGS, E. GPrest., St. Paul & Tacoma Lumber Co., Tacoma, Wash.
321 c	GRIMES, I. BPlant Supt., National Lumber & Creosoting Co., Houston, Tex.
72 a	GROW, J. HSales Engineer, Allis-Chalmers Mfg. Co., Milwaukee, Wis.
231 c	HAGGANDER, G. AAsst. Bridge Engineer, C., B. & Q. R. R. Co., 547 W. Jackson Blvd., Chicago, Ill.
220 c	HALL, CHAS. SSupt. of Construction, P. O. Box 137, Brunswick, Ga.
195 с	Bank Bldg., New Orleans, La.
214 с	HAMNETT, W. SVice-Prest. & Mgr., Pittsburgh Testing Laboratory of Texas, 305 Praetorian Bldg., Dallas, Tex.
213 c	HARDEN, G. SSupt. Timber Preserving Plant, B., R. & P. Ry., Bradford, Pa.
187 c	HARRIS, PAGEVice-Prest., National Lumber & Creosoting Co., Houston, Tex.
123 a 82 c	HARTLEY, C. HGen. Mgr., Wisconsin & Northern R. R. Co., Oshkosh, Wis. HARTMAN, E. FPrest, Carbolineum Wood Preserving Co., 182 Franklin St.,
	New York.
53 a	HAWKES, A. WSales Manager, General Chemical Co., 112 W. Adams St., Chicago, Ill.
236 c 103 c	HELSON, J. RSupt., Watkins Creosoting Co., Metropolis, Ill. HENDRICKS, V. KAsst. Chief Engineer, St. Louis & San Francisco Ry. Co., Frisco Bldg., St. Louis, Mo.
335 с	HERMANN, GEO. EMgr., Vancouver Creosoting Co., Standard Bank Bldg., Vancouver, British Columbia.

212 c 75 c 294 c 320 c	HERT, A. T
179 с 19 3 с	HORROCKS, H. EMgr., Pacific Creosoting Co., Seattle, Wash.
342 с	HOWSON, E. T Engineering Editor, "Railway Age Gazette," Transportation Bldg., Chicago, Ill. HOYT, HERBERT B Asst. Supt. Timber Preserving Plant, B. R. & P. Rwy., Bradford, Pa.
265 с	HUNT, GEO. MChemist, Forest Products Laboratory, Madison, Wis.
224 c	IKIN, A. J
299 р	IRVING, A. E
252 c	JACKSON, W. ESupt., Treating Plant, Santa Fe Tie & Lbr. Pres. Co., Albuquerque, N. M.
124 c	JENNISON, H. GPrest., Jennison-Wright Co., 313 Huron St., Toledo, O.
260 c	JOHNSON, J. AForeman, Tie Preserving Plant, U. P. R. R. Co., Box 303, Laramie, Wyo.
136 a	JOHNSON, J. HB. Johnson & Son, Richmond, Ind.
66 c	JOYCE, A. RJoyce-Watkins Co., 332 S. Michigan Ave., Chicago, Ill.
147 c	JUDGE, F. BSupt. Timber Preservation, C. H. & N. Ry., Hull, Fla.
205 с	KAMMERER, A. LConsulting Engineer, von Schrenk & Kammerer, Tower Grove & Fladd Aves., St. Louis, Mo.
222 c	KEIG, J. RTreatment Inspector, A., T. & S. F. Ry. Co., Topeka, Kan.
292 с	KELLOGG, R. SSecy., National Lumber Mfrs. Assn., 925 Lumber Exchange, Chicago, Ill.
	KENDRICK, J. WConsulting Engineer, 14 E. Jackson Blvd., Chicago, Ill.
	KENT, A. S
201 c	
60 c	KUCKUCK, BERTHOLD. Representing Hulsberg & Co., 1357 E. 48th St., Chicago, Ill.
162 c 266 c	KUEHN, A. L
	of Canada, McGill University, Montreal, Can.
	LABROT, S. WPrest., American Creosote Works, New Orleans, La.
	LA GRONE, J. MMgr., Louisiana Creosoting Co., Winnfield, La. LANE, CHAS. ESupt. Creosoting Plant, St. Paul & Tacoma Lumber Co
	Tacoma, Wash. LANE, C. WSupervisor Timber Preserving Plants, Baltimore & Ohio R.
	R. Co., Green Spring, W. Va.
332 c	LANGE, ALBERTEuropean Manager, Lembcke, von Bernuth Co., 4 Lloyds Ave., London, E. C., England. LANGE I. H. Sacy, Northern Timber Products Co. Security Lymber Pills
59 c	LANGE, L. H
317 a	LARKIN, A. EMgr., Republic Creosoting Co., Plymouth Bldg., Minneapolis, Minn. LATTIMORE, C. HPrest., Creosoted Block Paving Co., Royal Bank Bldg., Toronto, Canada.
96 c	LAWSON, W. WSupt. Wood-Preserving Works, T. & N. O. Ry. Co., Houston,
400 -	Tex.
328 a	LEE, ROBERT EVice-Prest., Hobart Lee Tie Co., Springfield, Mo.
40 a 110 a	LEMBCKE, G. ALembcke, von Bernuth Co., 171 Madison Ave., New York. LEWIS, F. JPrest., F. J. Lewis Mfg. Co., 2500 S. Robey St., Chicago, Ill.
118 a	LEWIS, WM. HVice-Prest., F. J. Lewis Mfg. Co., 2500 S. Robey St., Chicago, Ill.
148 c	Chicago, Ill.
215 e	LINDSEY, JOHN B., JR Supt. Timber Treating Plant, L. & N. R. R. Co., Gautier, Miss. LOCKETT A M. Prest A M. Leskett & Co. 522 Persons St. No. Column
199 a	Miss. LOCKETT, A. MPrest, A. M. Lockett & Co., 533 Baronne St., New Orleans,
277 6	La. Lockett & Co., 533 Baronne St., New Orleans,

12 c 242 c	LOGAN, JOHN TPrest., National Lumber & Creosoting Co., Texarkana, Ark. LOOK, RICHARD VPrest., Canada Creosoting Co., Ltd., 1 King St., E., Toronto, Canada.
112 c	LORD, RUSSELLAyer & Lord Tie Co., Railway Exchange, Chicago, Ill.
61 c	LOUD, H. SVice-President, Railway Tie Treating Co., 165 Broadway, N. Y.
· 73 a	LOUNSBURY, JAS. A Vice-Prest., Greenlee Bros. & Co., Rockford, Ill.
151 a	LUND, C. AMgr., C. A. Lund Co., Merriam Park P. O., St. Paul, Minn.
196 c	MAITLAND, G. FDivision Engineer, Union Pacific R. R. Co., Kansas City, Mo.
41 c	MANLEY, R. SPrest, Creosoted Wood Block Paving Co., Queen & Crescent
	Bldg., New Orleans, La.
P	MANION, KERONAsst. Supt., American Creosoting Co., Newark, N. J.
263 с	MARRIOTT, F. G Engineer of Tests, Department of Works, Foot of Princess St., Toronto, Can.
336 a	MARTIN, JAS. RVice-Prest., Western Silo Co., Des Moines, Iowa.
329 p	MARTIN, LYMAN CClerk, American Creosoting Co., Indianapolis, Ind.
250 с	MARTIN, F. RTreating Inspector, C. & E. I. R. R. Co., Box 856, Marion, Ill.
137 c	MATTOS, F. DSupt., Creosoting Works, Southern Pacific Co., West Oakland, Cal.
52 c	McARDLE, FRANKSupt. Tie Plant, Indiana Zinc Creosoting Co., Terre Haute, Ind.
279 с	McCANDLESS, S. FMgr. Tie Dept., Canada Creosoting Co., 1 King St. E., Toronto, Can.
113 c	MEREDITH, W. CSupt., Southern Wood-Preserving Co., Atlanta, Ga.
71 c	MEYER, AUGUSTSupervisor Tie Plant, C., B. & Q. R. R. Co., Galesburg, Ill.
70 a	MILLS, W. CSalesman, Grasselli Chemical Co., The Arcade, Cleveland, O.
185 c	MIMS, LFuel & Timber Agent, Southern Pacific Co., Houston, Tex.
32 a	MITCHELL, L. EPrest., Dallas, Corsicana & Palestine Ry., Palestine, Tex.
164 c	MOLL, DR. FRIEDRICH 4 Brandenburgische St., Sudende, Berlin, Germany.
254 с	MOORE, ROBERT H Chief Engineer, American Creosoting Co., Louisville, Ky.
114 c	MOSES, L. BSales Manager, The Kettle River Co., Plymouth Bldg., Minneapolis, Minn.
309 с	MURCHIE, WILFRED E. Consulting Inspector, Shillito & Murchie, Maritime Exchange Bldg., New York.
240 с	MURRAY, D. LGen. Foreman, Tie Plant, Santa Fe Tie & Lbr. Pres. Co., Somerville, Tex.
307 р	MYERLY, J. RTreating Engr. Timber Preserving Plant, Baltimore & Ohio R. R. Co., Green Spring, W. Va.
50 c	NEWTON, H. MManager of Plants, The Kettle River Co., Plymouth Bldg., Minneapolis, Minn.
283 a	NIXON, E. AVice-Prest., Western Tie & Timber Co., 905 Syndicate Trust Bldg., St. Louis, Mo.
314 a	NIXON, WARREN CSecy., Western Tie & Timber Co., 905 Syndicate Trust Bldg., St. Louis, Mo.
186 с	NOYES, A. HSecyTreas., Ayer & Lord Tie Co., 1515 Railway Exchange, Chicago, Ill.
146 c	NOYES, GEO. WSupt., Timber Treating Plant, M., K. & T. Lines, Denison, Tex.
33 a	OKES, DAYContractor & Engineer, Hanlon & Okes, 319 Lumber Exchange, Minneapolis, Minn.
337 с	ORUMM, EDMUND OChief Inspector, Seattle Port Commission, Avalon Apartments, Seattle, Wash.
273 с	PADDOCK, EDW. FChem. Engr., Carbolineum Wood Pres. Co., 182 Franklin St., New York.
253 с	PARK, ERNEST SSales Engineer, The Rodd Co., 1402 Commonwealth Bldg., Pittsburgh, Pa.
26 с	PARMINTER, L. ISales Agent, Long Bell Lumber Co., Long Bldg., Kansas City, Mo.
268 с	PARROTT, R. DPrest. & Gen. Mgr., Atlantic Creosoting & Wood Preserving Works, Norfolk, Va.
271 c 343 c	PAUL, H. ATreating Inspr., C., R. I. & P. and M. P. Ry., Tie Plant, Ark. PEARSON, R. SForest Economist, Forest Research Institute, Dehra Dun, U. P. India.
	= · - · - · · ·

227 c	PERRY, ARTHUR WNight Gen. Foreman, Santa Fe Tie & Lbr. Pres. Co., Somerville, Tex.
191 c 217 c	PESTEL, A. CSupt. Tie Treating Plant, O., W. R. R. & N. Co., Wyeth, Ore. PINSON, J. FAsst. Engineer Bridge & Buildings, C. M. & St. P. Ry.,
	Seattle, Wash.
142 c 115 c	POLLOCK, SAMUEL T Asst. Supt. Tie Plant, Atlantic Coast Line, Gainesville, Fla. POOLER, F. STie Agent, C. M. & St. P. Ry., 1352 Railway Exchange, Chicago, Ill.
182 c	
	POWELL, A. O., Jr Chemical Engineer, 404 Central Bldg., Seattle, Wash.
91 c	POWELL, E. LPrest., New Orleans-Cuban Steamship Co., 802 Canal Bank Bldg., New Orleans, La.
284 с	OUINCY, R. B
	QUINCY, R. BRepresenting R. W. Hunt & Co., 1022 Hibernian Bldg., New Orleans, La.
061 -	DANICON D II Cost of Dist St II.les Costston Co St II.les On
261 c	RAWSON, R. HSupt. of Plant, St. Helens Creosoting Co., St. Helens, Ore.
331 c	RAY, JOHN RInspector in Charge Gulf States Lumber Inspection, Public Service Commission of N. Y., New Orleans, La.
155 с	RECORD, S. JAsst. Prof., Forest School, Yale University, New Haven, Conn.
226 с	REDMAN, KENNETHChemist, Pacific Creosoting Co., Creosote, Wash.
	REID, JOS. SSecy. & Treas., Clark Bros. Co., Olean, N. Y.
54 c	REX, GEORGE EManager Treating Plants, A., T. & S. F. Ry., Topeka, Kan.
228 a	
LLU a	RIDSDALE, P. SSecy., American Forestry Ass'n, 1410 H St., N. W., Washington, D. C.
131 c	ROBERTS, G. G Clarges St., Piccadilly W., London, England.
278 p	ROBINSON, DONALDStudent in Chemistry, 6538 Norman Blvd., Chicago, Ill.
133 с	RODD, THOS., JR1402 Commonwealth Bldg., Pittsburgh, Pa.
264 с	ROE, GEORGE JAsst. Treating Engineer, Pacific Creosoting Co., Creosote, Wash.
14 c	ROLLINS, H. MSupt., Gulfport Creosoting Co., Gulfport, Miss.
311 c	ROTH, E. J
	Chicago, Ill.
310 c	ROWLAND, J. WGeneral Tie Inspector, Baltimore & Ohio R. R. Co., Baltimore, Md.
241 a	RUEPING, MAXOwner, Hulsberg & Co., Lessingstra, Berlin, Germany.
90 c	RUFLI, H. MSupt., Republic Creosoting Co., Indianapolis, Ind.
78 c	RYAN, W. JSupt., National Lumber & Creosoting Co., Texarkana, Ark.
286 с	SACKETT, H. SNat'l Lbr. Mfr's Assoc., 925 Lumber Exchange, Chicago, Ill.
330 с	SAPOJNIKOFF, SERGEEngineer-Chemist, Principal Asst. to Chief of Wood-Preserving Laboratory of Russian Ministry of Railways, Petrograd, Russia.
63 c	SCHILLING, FRANKSupt., Eppinger & Russell Co., Long Island City, N. Y.
126 a	SCHMOOK, KARLRepresenting Guido Rutgers Kammandit Co., 20 Liechtensteinstrasse, Vienna, Austria.
206 с	SCHNATTERBECK, C. C. Editor, "Wood-Preserving," Mt. Royal Station, Baltimore, Md.
101 c	SCHOLTZ, A. CSupt., T. J. Moss Tie Co., Mt. Vernon, Ill.
189 с	SCHOMBURG, T. A Prest., Continental Tie & Lumber Co., Denver, Colo.
85 c	SCHULZ, HARRYSupt. Wood-Preserving Plant, San Pedro, Los Angeles & Salt Lake R. R., Los Angeles, Cal.
233 с	SEGALL, SGen. Mgr., Rutgers Works, Lessingstra, Berlin, Germany.
210 с	SEXTON, C. HSupervising Inspector, Western Electric Co., 463 West St.,
51 c	New York. SHIPLEY, GRANT BPrest., Pittsburgh Wood Preserving Co., Commonwealth
154 a	Bldg., Pittsburgh, Pa.
89 c	SHIPLEY, L. B
	SHUFORD, C. SSupt., Republic Creosoting Co., Mobile, Ala.
98 c	SIGNOR, GEO. WPrest., Geo. W. Signor Tie Co., Shreveport, La.
262 a	SJODAHL, H. A Chemist, Chatfield Mfg. Co., Station P, Cincinnati, O.
15 c	SMITH, AMOS MSupt., Ayer & Lord Tie Co., Argenta, Ark.
203 с	SMITH, E. BERNARDGen. Mgr., Dominion Tar & Chemical Co., Transcona,
	Manitoba, Canada.

291 c	SMITH, FRANCIS PConsulting Engineer, Dow & Smith, 131 E. 23rd St., New York.
45 c	SMITH, LOWRYSupt. Tie Plant, Northern Pacific R. R. Co., Brainerd, Minn.
34 c	SMITH, P. AAsst. Mgr., Norfolk Creosoting Co., Norfolk, Va.
28 c	SMITH, PHIL R5426 Sheridan Road, Chicago, Ill.
28 9 a	SMITH, R. G Engineer & Chemist, Standard Oil Co., 200 Bush St., San Francisco, Cal.
216 c	SMITH, V. CConsulting Engineer, Government Railroads of India, care of Parr's Bank, Ltd., London, N. W., England.
135 с	SMITH, W. JTreating Inspector, Pittsburgh & Lake Erie R. R. Co., Adelaide, Pa.
248 c	STAHL, K. FConsulting Chemist, General Chemical Co., 57th St. and A. V. Ry., Pittsburgh, Pa.
323 c	STAMFORD, ASupt., U. S. Wood Preserving Co., Buell, Va.
327 c	STEARNS, R. BVice-Prest., Milwaukee Electric Railway & Light Co., Public Service Bldg., Milwaukee, Wis.
104 c	STEINMAYER, O. CGeneral Treating Inspector, Frisco Lines, Springfield, Mo.
58 c	STERLING, E. AMgr., Trade Extension Dept., Nat'l Lumber Mfr's Assoc., 925 Lumber Exchange, Chicago, Ill.
238 a	STERNBERG, DR. LEO Manager, Hulsberg & Co., Lessingstra, Berlin, Germany.
13 с	STEWART, F. HSupt. Creosoting Plant, Central of Georgia Ry., Crump's Park, Ga.
92 c	STIMSON, EARL Engineer Maintenance of Way, Baltimore & Ohio R. R. Co., Baltimore, Md.
285 с	STOCKING, E. JSales Manager., Chicago Creosoting Co., Chicago, Ill.
312 c	STULL, T. G
287 c	SWAN, O. TSec'y, Northern Hemlock & Hardwood Mfr's Assoc., Oshkosh, Wis.
129 a	SWINK, ROBERT BGen. Mgr., Southern Tie & Lumber Co., Medon, Tenn.
36 c 304 c	TAYLOR, C. MARSHALL, Supt., Port Reading Creosoting Plant, Port Reading, N. J.
304 c	TAYLOR, THOS. BAsst. to Prest., American Creosoting Co., Louisville, Ky.
94 a	TEESDALE, CLYDE H Asst. Engineer, Forest Products Laboratory, Madison, Wis. TESHIMA, TOMOTAKE Asst. Mgr., Engrg. Dept., Mitsui & Co., 25 Madison Ave., New York.
339 с	THOMAS, MORRIS AOperating Engr., Pacific Creosoting Co., Creosote, Wash.
87 c	TIFFANY, C. WGen. Mgr., Acme Tie Co., Reed City, Mich.
192 с	TILLEY, C. MTimber Treating Inspector, Southern Ry., Washington, D. C.
197 с	TOWNSEND, T. GTimber Treating Inspector, Southern Ry., Washington, D. C.
16 a	TOWNSLEY, WM., JRGrasselli Chemical Co., The Arcade, Cleveland, O.
139 с	TRUMBULL, M. KVice-Prest., National Lumber & Creosoting Co., 1209 Commerce Bldg., Kansas City, Mo.
109 a	UNDERWOOD, F. DPrest., Erie Railroad, Hudson Terminal, New York.
17 c	VALENTINE, H. SSupt., Eppinger & Russell Co., Jacksonville, Fla.
6 5 c	VAN METRE, RICKERJoyce-Watkins Co., 332 S. Michigan Ave., Chicago, Ill.
207 a	von BERNUTH, OSCAR Prest., Lembcke, von Bernuth Co., 171 Madison Ave., New York.
141 c	von LEER, H. J Treating Inspector, Baltimore & Ohio R. R. Co., Madison, Ill.
46 c	von SCHRENK, DR. HConsulting Engineer, Tower Grove & Fladd Aves., St. Louis, Mo.
326 c	WADDELL, KENNETH M.Chemist, Santa Fe Tie & Lumber Preserving Co., Albuquerque, N. M.
256 c	WALLACE, HSupt., Canada Creosoting Co., Ltd., Trenton, Ontario, Can.
111 a	WALSH, P. RPrest., Walsh-Griffith Tie & Timber Co., 718 Title Guaranty Bldg., St. Louis, Mo.
81 c	WATERMAN, J. HSupt. of Timber Preservation, C., B. & Q. R. R. Co., Galesburg, Ill.
150 c	WATKINS, W. TPrest., Joyce-Watkins Co., 332 S. Michigan Ave., Chicago, Ill.
134 c	WEBER, J. MSupt., Ohio Wood Preserving Co., Orrville, O.
173 с	WEGENER, RALPH HInspector, St. Paul & Tacoma Lumber Co., 902 North M. St., Tacoma, Wash.

305	а	WEGENER, RICHARDPreservatives Salesman, 627 27th St., Milwaukee, Wis.
79	h	WEISS, HOWARD FDirector, Forest Products Laboratory, Madison, Wis.
171	c	WELSH, C. TAsst. Plant Operator, Republic Creosoting Co., Plymouth Bldg., Minneapolis, Minn.
177	С	WHITE, THOSAsst. Mgr., American Creosote Works, Station B, New Orleans, La.
149	c	WIGGETT, C. HSupt. Tie Plant, El Paso & Southwestern System, Alamogordo, N. M.
47	c	WILLIAMS, J. CSupt. Wood-Preserving Works, Barber Asphalt Paving Co., Maurer, N. J.
138	c	WILLIAMS, R. RVice-Prest. & Treas., Indiana Tie Co., Citizens National Bank Bldg., Evansville, Ind.
245	c	WILLIAMSON, H. EGen. Foreman Timber Preserving Plant, C., B. & Q. R. R., 307 E. First St., Sheridan, Wyo.
102	c	WINSLOW, CARLILE P. Engineer in Forest Products, Forest Products Laboratory, Madison, Wis.
125	c	WINSLOW, GEOFFREYMgr., Creosoting Dept., St. Paul & Tacoma Lumber Co., Tacoma, Wash.
235	c	WIRTH, PHILIPPPrest., Anthrol Wood Preserving Co., 332 Spring St., New York.
25 9	c	WOODWARD, G. WAsst. Supt. Timber Preserving Plant, B., R. & P. Ry. Co., Bradford, Pa.
298	С	WRIGHT, W. EManager Sales, Jennison-Wright Co., 313 Huron St., Toledo, O.
		ZELLER, W. CSupt., American Creosoting Co., Newark, N. J.
234	c	ZWINGAUER, NDirector, Rutger Works, Lutzowstrasse, Berlin, Germany.
Cor	rec	ted to December 1, 1916.

BIBLIOGRAPHY OF WOOD PRESERVATION.

D	UB	TT	C	TT	\sim	MC	
r	Un	11.1	L . P			N.>	

Dept.	, Bos	ctory Mutual Fire Insurance Companies, Inspecton, 1915.	tion
Ĺ	ry R	ot: F. J. Hoxie.	
McGraw-	Hill I	Book Co., New York, 1915-1916. vation of Structural Timber: H. F. Weiss.	
		ytell & Co., Chicago, 1904. reation of Timber: Samuel M. Rowe.	
		Association, New Orleans, La., 1916.	
F	loors	of Service.	
D. Van 1	Nostr: The F Sa	and Publishing Co., New York, 1885. Preservation of Timber by the Use of Antisep amuel B. Boulton.	tics:
Crees	oting	amber Manufacturers' Association and Association Companies of Pacific Coast, Seattle, Wash., 19 of the Douglas Fir Paving Blocks.	n of 16.
		· ·	
ં ડ		ural Timber Handbook on Pacific Coast Woods . P. M. Goss and Carl Heinmiller.	:
		Agriculture, Forest Service, Washington, D. C.	,,,,,
Bulletin	141.	Seasoning of Timber	1903
		Special Reference to Treated Timbers	1904
"	51.	Report of Condition of Treated Timbers Laid in Texas, Feb. 1902	1904
" .	70.	Effect of Moisture on Strength and Stiffness of Wood	1906
. 46	<i>7</i> 8.	Wood Preservation in the United States	1909
"	84.	Preservative Treatment of Poles	1911
"	88.	Properties and Uses of Douglas Fir	1911
"	95.	Uses of Commercial Woods of United States:	1911
	93.	Cedars, Cypresses and Sequoias	1911
"	99.	Uses of Commercial Woods of United States:	
		Pines.	1911
"	107.	The Preservation of Mine Timbers	1912
"	108.	Tests of Structural Timbers	1912
"	112.	Fire-Killed Douglas Fir: A Study of Its Rate of Deterioration, Usability, and Strength	1912
**	118.	Prolonging the Life of Cross-Ties	1912
"	126.	Experiments in the Preservative Treatment of	
		Red Oak and Hard Maple Cross-Ties	1913
Circula	r 39.	Experiments on the Strength of Treated Timber	1908
"	80.	The Fractional Distillation of Coal-Tar Creo-	4005
		sote	1907
"	. 98.	Ouantity and Character of Creosote in Well- Preserved Timbers	1907
"	101.	The Open Tank Method for the Treatment of	
		Timber	1907
ш	104.	Brush and Tank Pole Treatments	1907

U. S. I	ept. of	Agriculture, Forest Service—(Continued).	*
Circul	ar111.	Prolonging the Life of Mine Timbers	1907
"	112.	The Analysis and Grading of Creosotes	
"	117.	The Preservative Treatment of Fence Posts	
46	128.	Preservation of Piling Against Marine Wood	
		Borers	.1908
"	132.	The Seasoning and Preservative Treatment of	
		Hemlock and Tamarack Cross-Ties	
"	134.	The Estimation of Moisture in Creosoted Wood	1908
"	136.	The Seasoning and Preservative Treatment of Arborvitae Poles	1908
"	139.	A Primer of Wood Preservation	1908
"	141.	Wood Paving in the United States	1908
**	146.	Experiments with Railway Cross-Ties	1908
66	147.	Progress in Chestnut Pole Preservation	
**	151.	Preservative Treatment of Loblolly Pine Cross-	
		Arms	1908
"	164.	Properties and Uses of Southern Pines	1909
"	186.	Consumption of Wood Preservatives and	
		Quantity of Wood Treated in 1910	1911
u	188.	Volatilization of Various Fractions of Creo-	
		sote After Their Injection into Wood	
"	189.	Strength Values of Structural Timbers	
"	190.	A Visual Method of Determining the Penetra- tion of Inorganic Salts in Treated Wood	1911
**	191.	Modification of Sulphonation Test for Creosote	
"	192.	Prevention of Sap Stain in Lumber	
"	194.	Progress Report on Wood Paving Experiments	
		in Minneapolis	1912
"	198.	Condition of Experimental Chestnut Poles in	
	•	the Warren-Buffalo and Pougkeepsie-Newton	
		Square Lines After Five and Eight Years' Service	1912
"	199.	Quantity and Quality of Creosote Found in	1712
	177.	Two Treated Piles After Long Service	1012
66	200.	The Absorption of Creosote by the Cell Walls	1912
	200.		1012
66	204.	of Wood	
"		Strength Tests of Cross-Arms	
"	206.	Commercial Creosotes	1912
••	209.	Service Tests of Ties	1912
U. S. I	Depart m	ent of Agriculture.	
Bulle	tin 12.	Uses of Commercial Woods of United States:	
	•	Beech, Birches, and Maples	1913
"	67.	Tests of Rocky Mountain Woods for Telephone	
		Poles	1914
66	77.	Rocky Mountain Mine Timbers	1914
46	101.	Relative Resistance of Various Conifers to In-	
		jection with Creosote	1914
"	145.	Tests of Wood Preservatives	1915

U. S. Dept. of	Agriculture—(Continued).	. `
Bulletin 227.	The Toxicity to Fungi of Various Oils and	
	Salts	1915
" 28 6.	Strength Tests of Structural Timbers Treated	1015
." 212	by Commercial Wood-Preserving Processes	1915
" 333.	Termites, or "White Ants" in the United States: Their Damage, and Methods of Pre-	
	vention	1916
Farmers' Bu	lletin 387. The Preservative Treatment of Farm Timbers	1910
Yearbook.	Fungous Diseases of Forest Trees	1900
Extracts	Fungous Diseases of Forest Trees	1903 1905
U. S. Dept. of	Agriculture, Bureau of Entomology.	
Circular 127.		1010
" 134.	Dead Trees	1910
	Wood-Boring Insects	1911
	Agriculture, Bureau of Plant Industry.	
Bulletin 14.	The Decay of Timber and Methods of Preventing it	1002
" 114.	Sap-Rot and other Diseases of Red Gum	
	ngineer Bureau.	
Professional	Memoirs. Creosotes and Creosoting: Capt. John C. OakesApril-June,	1909
U. S. Dept. of	State.	
Daily Consu	lar and Trade Reports: Processes for Fireproofing WoodJan. 23,	1914
U. S. Dept. of	the Interior, Bureau of Mines, Washington, D.	C.
Bulletin.	Coal-Tar Products: H. C. Porter	1915
U. S. Treasury Hygiene L	y Dept., Public Health and Marine Hospital Ser aboratory, Washington, D. C.	vice,
Bulletin 22.	Chloride of Zinc as a Deodorant, Antiseptic, and Germicide	1905
Smithsonian I	nstitution, Washington, D. C. Report on Preservation of Wood	1864
Iowa Agriculti	ural Experiment Station, Ames, Iowa.	
Bulletin 158.	Preservative Treatment of Fence Posts: G. B. MacDonald	1916
Maryland Stat	e Board of Forestry, Baltimore, Md.	
In	F. W. Beasley	1912
Missouri Agri	cultural Experiment Station, Columbus, Mo.	
	How to Prolong the Life of Fence Posts:	
	1. A. Ferguson	1911

PROCEEDINGS:	
American Association for the Advancement of Science.	
Paraffin Bodies in Coal-Tar Creosote and Their Bearing on Specifications: S. R. Church and John Morris Weiss	1914
Creosoted Wood Block: Geo. W. Tillson	
American Electric Railway Engineering Association.	
Some Factors Affecting the Application of Wood Preservatives to Electric Railways: C. P. Winslow and C. H. Teesdale	1915
American Iron and Steel Institute, New York.	
Byproducts Recovered in the Manufacture of Coke: W. H. Childs	1916
American Institute of Electrical Engineers, New York.	
Recent Results Obtained from the Preservative Treatment of Telephone Poles: F. L. Rhodes and R. F. Hosford	1015
American Railway Bridge & Building Association, Elgin, Ill.	2720
Report of Committee on Wood Preservation1908 Preservation of Timber	-1912 1913
Annual Cost of Treated and Untreated Piles in Trestles	1914
American Railway Engineering Association, Chicago, Ill.	
Changes Which Take Place in Coal-Tar Creooste During Exposure: Hermann von Schrenk, E. B. Fulks and A. L. Kammerer	1907
Report of Committee on Wood Preservation1909	-1916
Precautions to be Observed in Burnettizing Ties: Octave Chanute	1909
The Microscopical Structure and Physical Condition of Wood as Affects Penetration by Preservatives: Harry D. Tiemann	1909
Condition of Treated Timbers Laid in Texas in 1902: Carlile P. Winslow	
Tentative Grouping of Ties for Experimental Preservative Treatment: Howard F. Weiss	1910
Fungi Which Live on Structural Timber: C. J. Humphrey	1910
Fourth Progress Report on Tests on Treated Ties: W. K. Hatt Note on the Strength of Ties Treated with Crude	1910
<i>Ou:</i> W. K. Hatt	1911
The Electrical Resistance of Timber as Affected by Treatment with Preservatives: J. T. Butter- field	1911
Grouping of Timbers for Antiseptic Treatment	1912
Air Seasoning of Ties: Wm. H. Kemper1913-	1914
The Use of Refined Coal-Tar in the Creosoting In- dustry: Dr. Hermann von Schrenk and Alfred	1014
L. Kammerer Effect of Creosoting on Strength of Oregon Fir Pil- ing: H. B. MacFarland.	

American Railway Engineering Association—(Continued).	
Test of Treated and Untreated Oregon Fir Piling:	1014
H. B. MacFarland The Effect of the Structure of Wood Upon its Per-	1914
meability: Irving W. Bailey	1915
Test of Douglas Fir Bridge Stringers: H. B. Mac- Farland	1916
Water Sampling in Creosote Oil; Relation of Amount of Preservative and Depth of Penetration to the Resistance of Materials Against Decay; Compilation of Service Tests	1916
Service Tests of Treated and Untreated Fence Posts: Harlow Bradley	1916
Service Tests of Ties in the Chicago & North Western Railway near Janeswille, Wis.; Northern Pacific Railway near Plains, Mont.; and Northern Pa- cific Railway near Maywood, Wash.: C. H. Teesdale	
Tie Durability Records: C. P. Winslow and C. H. Teesdale	
American Society of Civil Engineers, New York.	
	1885
The Artificial Preservation of Railroad Ties by the Use of Zinc Chloride: Walter W. Curtis	1899
The Preservation of Railway Ties in Europe: O. Chanute	1900
Timber Preservation, Its Development and Present Scope: Walter Buehler	1910
American Society of Municipal Improvements, Indianapolis, I	nd.
Wood Block Pavements with Reference to Economic and Efficient Wood Preservatives: J. W. Howard	1015
The Treatment of Wood Paving Blocks: C. H. Tees-	1915
dale	1916
American Society for Testing Materials, Philadelphia, Pa.	
A Fungus Bed Test of Wood Preservatives: C. M. Chapman	1015
The Sampling and Analysis of Creosote Oil	
American Wood-Preservers' Association, Baltimore, Md.	
Testing of Creosote Oils: H. W. Jayne	1905
Twenty-three Years' Experience with Creosoted Timber, and Results: J. C. Haugh	1905
The Use of Saturated Steam During Treatment: F. D. Beal	1905
How Heating Coils Can be Maintained in the Retorts: E. S. Christian	
The Adoption of a Standard Method of Computing Prices on Treated Timber: P. F. Dundon 1	
Education for Timber-Preserving Specialists:	
F. D. Beal	LYUD

American Wood-Preservers' Association—(Continued).	
Classification of the Proper Condition of Timber for Treatment: A. S. Case	1906
General Conditions Governing Wood-Preserving Plants: D. Burkhalter	1906
The Future Progress of Wood Preservation: Carl G. Crawford	
A Sketch of Methods and Practice in Use at Mexican Central Railway Company's Plant at Aguascalient J. E. Philippi	es: 1906
Progress of Timber Preservation in 1906: Carl G. Crawford	1907
The Advantages and Disadvantages of Steaming: O. Chanute	1907
The Causes of Decay in Timber: C. W. Berry	1907
History of Wood Preservation in America: Octavo Chanute	1909
Heartwoods Which can be Treated: H. J. Valentine.	1909
The Treatment of Dead Timbers: C. W. Berry	1909
The Proper Grouping of Timbers for Treating:	1909
J. S. Baker	1909
Quantity and Quality of Creosote for Treating Piling:	1909
R. J. Calder	
Should an Attempt be made to Air-Season Timber	1707
Before Treating in the Southern Part of the United States: R. L. Allardyce	1909
What is the Best Power for Moving Ties and Material Throughout the Yard and Into the Retorts:	
J. B. Card	1909
Treating in Open-Tanks	1909
Experience in Injury to Men from Handling Creo- soted Material	1909
Effect of Timbers Treated With Creosote or Zinc Chloride on Electric Currents Passing Through Other Materials in Contact With the Timber	1909
Creosoting Douglas Fir: David Allerton	1909
What Effect Does the Time of Cutting Timber Have on the Rate of Seasoning and Treatment of	1707
Same: - J. C. Williams	1910
Economics of Cables, Electricity or Locomotives in Moving Materials at Plants: Andrew Gibson	1910
Inflammability of Treated Timber: H. M. Rollins	1910
Advantages and Economy of Various Retort Doors: David Allerton	1910
Advantages and Economy of Various Retort Doors: S. M. Rowe	1910
Precaution to be Observed for Prevention of Fire in Creosoting Plants: Lowry Smith	

American Wood-Preservers' Association—(Continued).	
Precautions to be Observed to Prevent Fire at Plant. H. J. Whitmore	. 1910
Results Obtained by Treating with Crude Petroleun C. M. Taylor	. 1910
What Per Cent. of Creosote Oil can be Withdraw from Wood by Subsequent Vacuum: J. B. Card	m . 1910
Written Discussion on Preceding Article: David Allerton	. 1910
The Forest Products Laboratory at Madison, Wicconsin: Howard F. Weiss	s- . 1910
- Notes on Creosote Analysis: H. M. Newton	. 1910
Proper Grouping of Timbers for Treating: F. J. Angier	. 1910
Amounts of Various Antiseptics Required per Cub Foot to Obtain Good Results for Various Pu poses: R. L. Allardyce	. 1910
Is the Covering of Retorts Economical and Pra	c -
tical: R. W. Yarbrough	
Discussion of Preceding Article: J. C. Williams	
How Can Excessive Insurance Rates Usually Charge by Insurance Companies be Avoided: R. J. Calde	r 1910
Difficulties Encountered by Plants in the North The Plants Located in the South do not Have to Contend With: Andrew Gibson	1- . 1911
Should Sawn and Hewn Ties of the Same Kind of Timber of the Same Degree of Seasoning later Treated in the Same Cylinder Load: H. J. Whitmore	of De . 1911
Wood Block Paving: Dr. Hermann von Schrenk	. 1911
How to Pile Lumber, or Piling Timber: J. H. Waterman	
Feasibility of Grouping Timbers for Treatment: W. F. Goltra	
What Depths of Penetration Are to be Expected fro the Different Amounts of Preservatives Usual Specified: David Allerton	m !y
What Depths of Penetration are to be Expected fro	m
the Different Amounts of Preservatives Usual Specified: R. L. Allardyce	. 1911
Discussion of Preceding Articles: J. C. Williams	
Some Results Obtained in this Country in Prolongin the Life of Railway Cross Ties by Preservatin Treatment as Shown by the Records that hav been Kept, and a Better Method of Keeping the	je je
Records: F. J. Angier	. 1911
Some Results from Treated Ties along the South Atlantic Coast: Wm. A. Fisher	h . 1911
Timber Supply in Relation to Wood Preservation: E. A. Sterling	. 1911

American Wood-Preservers' Association—(Continued).	
General Review of Timber Treating in this Country, with Special Reference to Causes That Have Been and are Retarding its Mare Universal Adoption: John T. Logan	
Review of Development in Timber-Treating Industry: Walter Buehler	1911
Benefits Derived from Attending Annual Meetings of the Wood-Preservers' Association by Members of the Association: Wm. Townsley, Jr	
What Percentage of Creosote Oil can be withdrawn from Wood by Subsequent Vacuum:	1911
C. D. Chanute	1911
Asphaltic Oils as Applied to the Preservation of Railroad Ties: Frank W. Cherrington	1911
Impurities in Zinc Chloride: C. Marshall Taylor	
The Production of the Wooden Cross Tie: A. R. Joyce	1912
Economic Material for Boat and Barge Construction:	1012
A. E. Hageboeck	1912
Scientific Management of Timber-Preserving Plants: D. Burkhalter	
Efficiency in Plant Operation: E. A. Sterling	1912
Creosote Oil Specifications and Methods of Analysis: S. R. Church	
Evaporation of Creosote and Crude Oils: P. E. Fredendoll	
Comparison of the Absorption and Expansion of Properties of Wood Paving Blocks when Treated with Paving Oil of a Specific Gravity of 1.2 and Creosote Oil of Specific Gravity of 1.055: H. M. Rollins	
Wood Block Pavement from a Construction Stand-	
point: Day I. Okes	
	1912
Structure of Commercial Woods in Relation to the Injection of Preservatives: Howard F. Weiss	
Structure of Commercial Woods in Relation to the Injection of Preservatives: Howard F. Weiss Creosotes and Creosoting Oil: David Allerton	1912
Injection of Preservatives: Howard F. Weiss Creosotes and Creosoting Oil: David Allerton Creosote Specifications and Analysis: Dr. Hermann von Schrenk	1912 1912 1912
Injection of Preservatives: Howard F. Weiss Creosotes and Creosoting Oil: David Allerton Creosote Specifications and Analysis:	1912 1912 1912
Injection of Preservatives: Howard F. Weiss Creosotes and Creosoting Oil: David Allerton Creosote Specifications and Analysis: Dr. Hermann von Schrenk	1912 1912 1912 1912
Injection of Preservatives: Howard F. Weiss Creosotes and Creosoting Oil: David Allerton Creosote Specifications and Analysis: Dr. Hermann von Schrenk Arrangement of Yard; Piling Ties and Timber and Kindred Subjects: J. H. Waterman Treating Seasoned vs. Unseasoned Ties: F. J. Angier Inspectors and Inspection of Material and Treatments at Commercial Plants: R. L. Allardyce	1912 1912 1912 1912 1912
Injection of Preservatives: Howard F. Weiss Creosotes and Creosoting Oil: David Allerton Creosote Specifications and Analysis: Dr. Hermann von Schrenk Arrangement of Yard; Piling Ties and Timber and Kindred Subjects: J. H. Waterman Treating Seasoned vs. Unseasoned Ties: F. J. Angier Inspectors and Inspection of Material and Treatments at Commercial Plants: R. L. Allardyce Preservation of Power Transmission Poles:	1912 1912 1912 1912 1912 1912
Injection of Preservatives: Howard F. Weiss Creosotes and Creosoting Oil: David Allerton Creosote Specifications and Analysis: Dr. Hermann von Schrenk Arrangement of Yard; Piling Ties and Timber and Kindred Subjects: J. H. Waterman Treating Seasoned vs. Unseasoned Ties: F. J. Angier Inspectors and Inspection of Material and Treatments at Commercial Plants: R. L. Allardyce Preservation of Power Transmission Poles: W. R. Wheaton The Production and Supply of Coal-Tar Creosote:	1912 1912 1912 1912 1912 1912
Injection of Preservatives: Howard F. Weiss Creosotes and Creosoting Oil: David Allerton Creosote Specifications and Analysis: Dr. Hermann von Schrenk. Arrangement of Yard; Piling Ties and Timber and Kindred Subjects: J. H. Waterman. Treating Seasoned vs. Unseasoned Ties: F. J. Angier Inspectors and Inspection of Material and Treatments at Commercial Plants: R. L. Allardyce Preservation of Power Transmission Poles: W. R. Wheaton	1912 1912 1912 1912 1912 1912 1913

American Wood-Preservers' Association—(Continued).	
Notes on Analysis and Testing of Coal-Tar Creosote: L. B. Shipley	1913
Some Experimental Treatments with Reference to the Effect of Initial Air Pressure on Penetration of	
Creosote: R. S. Belcher	1913
The Requirements for Successful Timber Treatment: Dr. Hermann von Schrenk	1913
The Preliminary Treatment of Timber to Insure a More Even and Satisfactory Impregnation with Creosote: David Allerton	1913
The Treatment and Care of Floors: Geo. W. Saums.	1913
Preservation of Lumber for Car Construction: J. H. Waterman	1913
Sap in Relation to the Properties of Wood: S. J. Record	
The Mutual Interest of Railroads and Commercial Companies in the Work of This Association:	
L. B. Moses	1913
History of Wood Preservation: W. F. Goltra Piece-Work or Unit System of Handling Ties and	1913
Timbers: W. W. Eldridge	1913
Some Tests to Determine the Effect upon Absorption and Penetration of Mixing Tar with Creosote: F. M. Bond	1913
The Transmission of Air Pressure in Cross Ties: C. P. Winslow	1913
Adzing and Boring Ties, and the Cost of Installing Plants of this Kind: J. A. Lounsbury	1913
Natural and Artificial Seasoning of Douglas Fir for Treatment: F. D. Beal	1913
Treatment of Douglas Fir with Creosote Oil: Geo. A. Colman	
Efficient Handling of Ties and Material: A. M. Smith	
Preparing Timber for Treatment in the Gulf States: R. I. Allardyce	1913
How nearly does the Modern Yellow Pine Block Pavement Approach the Ideal Pavement and what	1710
Improvement can we Suggest? H. L. Collier	1913
Address by J. E. Rhodes, Secretary-Manager of the National Lumber Manufacturers' Association	1913
Timber for Creosoted Block Paving: H. G. Davis	1913
Address by George K. Smith, Secretary Yellow Pine Manufacturers' Association	1913
Laying Wood Block Pavement: H. S. Loud	1913
Address of Welcome by Mayor Behrman of New Orleans	1914
Some Methods of Separating Water from Creosote Oil: Thomas White	1914
Wood Preservation and Forest Conservation: J. H. Waterman	
Specifications for Creosote Oil	

American Wood-Preservers' Association—(Continued).	
Details of Methods of Testing Creosote Oil	1914
Creosote Oil: P. C. Reilly	1914
The Use of Refined Coal-Tar in the Creosoting Industry: Dr. Hermann von Schrenk and Alfred	
L. Kammerer	1914
Preliminary Work in Fireproofing Wood: Robert E. Prince	1914
A Comparison of Wood Paving in European Countries and the United States: S. R. Church	1914
Report of Creosoted Piling in Galveston Bay Bridge of Santa Fe Railway	
The Construction of Creosoted Wood Block Pave- ments: R. S. Manley	
Creosoted Wood Block Pavements: Harry G. Davis.	
Results Obtained by Piling Creosoted Wood Blocks Closely in Cages and the Saving Effected Thereby:	
Closely in Cages and the Saving Effected Thereby:	1014
R. H. White	1914
The Preservation of Wood by Means of Corrosive	1714
Sublimate (Kyanizing): Dr. Friedrich Moll	1914
The Protection of Ties from Mechanical Destruction: Howard F. Weiss	1914
Future Tie Material in the United States: H. H. Gibson	1914
Treatment of Piling and Timber According to Condition of Use and Exposure: E. L. Powell	
Some Facts which I have gathered from Observation and Inspection of Experimental Ties:	
J. H. Waterman	
Steaming Process for Ties and Timbers	1914
Air Pumps vs. Hydraulic Pumps for Injecting Pre- servatives into Wood: F. J. Angier	1914
The Effect of Varying the Preliminary Air Pressure in Treating Ties upon the Absorption and Pene-	
in Treating Ties upon the Absorption and Pene- tration of Creosote: Clyde H. Teesdale	1914
Mechanical Handling of Railroad Cross Ties and Timbers at Timber Preservation Plants: Lambert T. Ericson	
Lambert T. Ericson	1914
Discussion of Preceding Paper: F. J. Angier, J. H. Waterman, William A. Fisher, Amos Smith and Carl G. Crawford	1014
Tram Cars and their Construction: J. H. Grow	1014
Methods of Keeping Tie Records: E. T. Howson	
The Yale Forest School: Samuel J. Record	
Address of George S. Wood, of the Forest Products Exposition	
Quantity of Wood Preservatives Consumed and	
Amount of Wood Treated in the United States in 1913: Clark W. Gould	1914
Timber-Treating Plants in North America:	
W. F. Goltra	1914

American Wood-Preservers' Association—(Continued).	
Economical Use of Steam in Connection with Wood-	
Preserving Plants: A. M. Lockett	
Discussion on Plant Operation: Samuel T. Pollock	1919
Strength and Quality of Zinc Chloride Per Tie or Per Cubic Foot of Timber: W. F. Goltra	1915
Discussion on the Economical Use of Steam: M. K. Trumbull	1915
Discussion on Leaching of Zinc Salts and Effects of Improper Drainage: F. J. Angier	1915
Some Suggestions for the Welfare of the Association: Charles C. Schnatterbeck	1915
Temperature Changes in Wood Under Treatment:	
George M. Hunt	1915
Treatment: H. M. Rollins	
Discussion on Steaming Ties: J. B. Card	
The Final Inspection of Timber: C. M. Taylor	
A Voice From the Pacific Coast: H. E. Horrocks	1915
A Specification for a Coal-Tar Creosote Solution: Dr. Hermann von Schrenk and Alfred L. Kam-	1015
merer	1915
Discussion on a Specification for a Coal-Tar Creo- sote Solution: V. K. Hendricks, P. C. Reilly and J. C. Williams	1015
Air Seasoning of Cross Ties: A. H. Noyes	1015
Method of Buying and Inspecting Ties Produced along	1913
the Right of Way: W. F. Goltra	1915
Discussion on Air Seasoning of Cross Ties: Samuel J. Record and Wm. A. Fisher	1915
A Method for Finding the Annual Charges for Ties: Harrington Emerson and T. T. Bower	1915
Discussion on a Method for Finding the Annual Charges for Ties: V. K. Hendricks, W. F. Goltra,	
C. P. Winslow	1915
The Mechanical Life of Ties as Affected by Ballast:	
E. Stimson	
Additional Facts on Treated Ties: J. H. Waterman Treated Timber for Factory Construction:	1915
F. J. Hoxie	1915
The Comparative Toxicity of Coal-Tar Creosote and Creosote Distillates and of Individual Constituents for the Marine Wood-Borer, Xylotrya:	
Dr. L. F. Shackell	1915 1915
Discussion on Sill Ties: Samuel T Pollock and	
Harrington Emerson. Destruction of Timber by Marine Borers: E. S. Christian. Discussion on Destruction of Timber by Marine	1915
E. S. Christian	1915
Borers: J. C. Williams	1915
T. G. Townsend	1915

merican Wood-Preservers' Association—(Concluded).	
Laboratory Analysis after Treatment versus Actual Record during Treatment of Creosoted Wood Paving Blocks: Frank W. Cherrington	1915
Discussion on Report on Wood Block Paving: E. R. Dutton	
The Bleeding and Swelling of Paving Blocks: Clyde H. Teesdale	
Discussion on Bleeding and Swelling of Wood Block	
Pavements: L. E. Hess and E. R. Dutton Progress in Timber-Treating Industry:	
J. W. Kendrick	
Methods of Creosoting Douglas Fir Timbers: O. P. M. Goss	
Vacuum Process in Creosoting: John D. Isaacs	1916
Notes on Measuring Devices and on Methods of De- termining Cubical Contents Per Charge:	
C. W. Lane	1916
Selecting and Buying Fuel: W. H. Grady	1916
The Foreign Creosote Oil Situation: G. A. Lembcke.	
Woods Suitable for Cross Ties: R. Van Metre	1916
Quantity of Zinc Chloride Per Tie or Per Cubic Foot of Timber, and Method of Determining the True Strength of the Solution: W. F. Goltra	1016
Marine Borers from the Wood-Preservers' Stand- point: Dr. L. F. Shackell	1916
Preservative Specifications for Wood Paving Blocks: A. E. Larkin	
Fungi Which Grow on Untreated Ties or Untreated Wood: Dr. H. von Schrenk	
Treated Wood Block for Factory Flooring and Miscellaneous Uses: C. H. Teesdale	
Service Tests of Wood Block Paving	
Woods Suitable for Cross Ties:	
Cartile P. Winslow and John A. Newlin	
Conservation of our Natural Resources: F. H. Newell Service Tests of Cross Ties	
Durability Records of Cross Ties: Carlile P. Winslow and C. H. Teesdale	
Service Tests of Bridge and Structural Timber	
Revision of the Constitution: John Foley	
Quantity of Wood Preservatives Consumed and	
Amount of Wood Treated by Wood-Preserving Plants in the U. S. in 1915: R. K. Helphenstine	1916
U. S. Patents on Wood Preservation: D. D. Berolzheimer	1916
Bibliography of Wood-Boring Crustaceans: Dr. F. Moll	1916
rkansas Good Roads and Drainage Association, Little Rock,	Ark
Creosoted Wood Block Paving: Walter Buehler	

Association of Engineering Societies, St. Louis, Mo.
The Preservation of Railway Ties and Timber by the
Use of Antiseptics: Joseph P. CardApril, 1887
Wood-Preserving and Uses of Treated Lumber:
F. A. Weaver
Timber Conservation and Preservation in the United
States: E. L. Powell
Preservative Treatment of Timber: J. M.
GoldmanOct., 1914
The Creosoting of Cross-Ties as Practiced by Ameri-
can Railroads: O. C. SteinmayerMar., 1915
Engineering Society of Western Pennsylvania.
The Preservation of Structural Timbers from Decay: C. P. Winslow
Engineers' Club of Philadelphia, Pa.
Methods and Economic Aspects of Modern Timber
Preservation: Gellert Alleman 1907
International Congress of Applied Chemistry.
Tests to Determine the Commercial Value of Wood Preservatives: H. F. Weiss. Vol. 13, Section 6a 1912
Autisablic Tests of Wood Preserving Oils: A I
Antiseptic Tests of Wood-Preserving Oils: A. L. Dean and C. R. Downs. Vol. 13, Section 6a 1912
International Engineering Congress San Francisco Cal
International Engineering Congress, San Francisco, Cal. Preservative Treatment of Timber: H. F. Weiss
and C. H. Teesdale
Louisiana Engineering Society, New Orleans, La.
Creosoted Wood Block Pavements: F. P.
Hamilton
National Electric Light Association, New York.
Report of Committee on Preservative Treatment of
Poles and Cross-ArmsMay, 1910 and May, 1911
Poles and Pole Preservation: Russell A. Griffin 1913
National Fire Protective Association.
Tests on the Inflammability of Untreated Wood and
Tests on the Inflammability of Untreated Wood and of Wood Treated with Fire-Retarding Com-
pounds: R. E. Prince
National Lumber Manufacturers' Association, Chicago, Ill.
Preservative Treatment of Farm Timbers: E. A. Sterling
New England Railroad Club, Boston, Mass.
A General Consideration of Timber Under Conditions
of Modern Demand and Growth: Hermann von Schrenk
New York Railroad Club.
The Seasoning and Preservative Treatment of Wood-
en Cross-Ties: F. J. Angier
Railway Storekeepers' Association, Cleveland, O.
Treatment of Lumber and the Handling of Same Be-
fore and After Treatment: Hermann von Schrenk
Schrenk 1909
St. Louis (Mo.) Railway Club.
Recent Progress in Testing Wood Used by the Rail- roads: H. F. Weiss
70005: D. F. Weiss


Western Society of Engineers, Chicago, Ill.	•
Preservative Treatment of Timber: O. Chanute. April,	1900
Preservation of Timber: S. M. RoweJune,	1900
Factors Which Cause the Decay of Wood: Hermann	
von SchrenkMay,	1901
Timber Treating Plants: W. W. CurtisOct	.,1903
Wood Preservation from an Engineering Standpoint:	1910
C. T. Barnum	Asso-
Prevention of Decay in Factory Timbers: F. J. Hoxie	1914
PERIODICALS:	
American City, New York.	
Wood Block Pavements: H. S. LoudMarch,	1916
American Lumberman, Chicago, Ill.	
Wood Block for Factory FloorsNov. 28,	1914
Impregnation of Timber to Protect it from Fire:	4044
Dr. F. Moll	1914
The Preservative Treatment of Wooden Silos: G. M. Hunt	1915
Preservative Treatment of Wood:	
E. W. Peters	1915
Wood Preservation: H. E. HorrocksJuly 17,	
Rot in Stored Lumber; A Danger to Builders and Dealers: C. J. Humphrey	1915
How Strengths of Woods are TestedAug. 7,	1915
Silo Preservatives that are SafeSept. 11,	
Demand for Creosoted Wood ConduitsOct. 2,	
Wood Blocks Treated EconomicallyNov. 20,	
Fire Tests of Wood at the Forest Products Labora-	
tory: Clyde H. TeesdaleDec. 11,	1915
Test Proves Wood's Fire-Resistive Qualities Dec. 18,	1915
American Roofer.	
Fire-Proofing Wooden Shingles: H. F. Weiss. Dec.,	1914
Armour Engineer, Chicago, Ill.	
The Preservation of Wood from Decay: Clyde H. Teesdale	1915
Canadian Engineer, Toronto, Ontario.	
Battle Against RotNov. 19,	1914
Creosoted Wood Block Paving: Andrew F. Macallum	1915
Creosofed Wood Block Pavements: Andrew F. Macallum	
	1710
Electric Railway Journal, New York.	1010
Wood Preservation: A. L. Kuehn	1910
Economical Use of Wood and Preservation of Timber: E. W. Bright	1914

Electric Traction Weekly, Cleveland, O.
Timber Preservation: Carlile P. Winslow 1911
Engineering News, New York.
Creosoting Plant of the Pacific Creosoting Co., Eagle Harbor, Wash
Marine Wood Destroyers in the Waters of the South Atlantic Ports: W. H. FaucetteJan. 5, 1911
Tie Treating Plant, Louisville & Nashville R. RSept. 24, 1914
New Tie Treating Plant on the Chicago & North- western Railway: L. J. PutmanApril 20, 1916
Resin in Yellow Pine for Decay Resistance: F. J. Hoxie and Dr. Hermann von SchrenkApril 20, 1916
Engineering Record, New York.
Plant of the National Lumber & Creosoting Co Grant B. Shipley
Factors Affecting Structural Timbers: H. S. Betts
Efficiency of Various Parts of Coal-Tar Creosote Against Marine Borers: C. H. Teesdale. Sept. 12, 1914
How the Wood-Preserving Industry can Avoid Possible Injury Resulting from the War: C. H. Teesdale
Decay in Wooden Bleachers: C. H. Teesdale. Oct. 3, 1914
Crasstat Wood Blocks Suitable for Bridge Floors
Creosoted Wood Blocks Suitable for Bridge Floors if Fire-Proofed: L. T. EricsonJune 5, 1915
Forestry Quarterly, Toronto Canada.
Preservative Treatment of Wood: Irving W. Bailey
Preservation of Mine Timbers: Dr. F. Moll Vol. 13, 1915
Journal of Industrial & Engineering Chemistry, Easton, Pa.
Method of Determining the Amount of Zinc Chloride in Treated Wood: Ernest BatemanJan., 1914
Toxicity of Various Wood Preservatives: C J. Humphrey and Ruth M. Fleming [Feb., 1914]
(Aug., 1915)
The Application of the Davis Spot Test in the Pre- liminary Examination of Creosotes: H. C. Cloukey
Study of the Composition of Water-Gas-Tar: C. R. Downs and A. L. Dean
New Method for Determining Zinc in Treated Wood: M. Hume Bedford and R. PfansteilOct., 1914
Specific Gravity; Its Determination for Tars, Oils and Pitches: John Morris Weiss
Lumber Trade Journal, New Orleans, La.
Preservation of Timber by Use of Fluoric Salts: Dr. F. Moll
Measuring Moisture in Green or Dry Lumber: S. D. Curtis

Lumber World Review, Chicago, Ill.	
Domestic Supply of Wood Preservatives: Clyde H. TeesdaleOct. 19, 19	11.4
Modern Uses of Wood:	14
Dr. Hermann von SchrenkApril 25, 19	15
Mining & Engineering World, Chicago, Ill.	
Seasoning and Preservative Treatment of Mine Timbers	12
Municipal Engineering, Chicago, Ill.	
Asphaltic Oils, Economical Wood Preservatives: Frank W. CherringtonMay, 19)11
Durability of Creosoted Block Pavements Increased by Modern Methods of Treatment: Frank W. Cherrington	915
Frank W. Cherrington	916
Municipal Journal, New York.	
Experiments with Wood Paving Blocks: Clyde H. Teesdale	915
Railway Age Gazette, New York.	
Effect of the War on Timber Preservation. April 13, 19 Creosoted Wood Block Floors for Railroad	115
Buildings	915
Railway & Engineering Review, Chicago, Ill.	
Chemical Treatment of Timber: Hermann von SchrenkJune 6, 19	903
Preservation of Timber from Decay: W. F. GoltraOct. 7, 19 Steaming Timber Before Treating with Preservatives:	911
Steaming Timber Before Treating with Preservatives: O. Chanute	913
Railway Maintenance Engineer, Chicago, Ill.	
Penetration of Preservatives: Lowry SmithJune, 19	916
Railway Review, Chicago, Ill. Air Seasoning of Timber: .W. H. KempferJan. 10, 19	914
Tie Timber and the Unnecessary Wear and Tear of Track: Geo. E. Rex	915
Proper Oil for Creosoting Wood Blocks for Paving: P. C. Reilly	916
Scientific American Supplement, New York.	
The Modern Electrical Process for Rapidly Drying and Preserving WoodOct. 31, 19 Marine Wood Borers: Clyde H. TeesdaleDec. 5, 19	914
Marine Wood Borers: Clyde H. TeesdaleDec. 5, 1	914
Southern Lumberman, Nashville, Tenn.	
Impregnation of Preservatives: Samuel J. Record	914
Variation in Weight and Strength of Timber: J. A. Newlin	
Sanitam, Llandling of Timber.	
C. J. HumphreyApril 1, 1	916

Telephony, Chicago.
Study of the Use and Preservation of Wooden Poles:
Dr. F. Moll
Poles: Clyde H. TeesdaleApril 3, 1915
Treatment of Poles and Cross-Arms with Preservatives: J. B. Wilkinson
University of Washington Forest Club Annual, Seattle, Wash.
The Value of Ammonium Polysulphide as a Wood Preservative: Donald H. ClarkVol. III, 1915
West Coast Lumberman, Seattle, Wash.
Dry Rot in Buildings of Mill Construction: Howard B. OakleafDec. 15, 1915
Preservative Treatments: Geo. E. Rex Jan. 1, 1916
Wood-Preservers' Bulletin, (Wood-Preserving), Baltimore, Md.
Penetration of Timber by Preservatives: Clyde H. TeesdaleVol. I No. 3, 1914
Specific Gravity and Weight of Some Important
American Woods
Carlile P. WinslowVol. I No. 3, 1914
St. Helens Creosoting Plant, St. Helens,. Oregon
Wood-Preserving, Baltimore, Md.
Baltimore & Ohio Timber Preserving Plant, Green Spring, W. Va
The Galesburg (Ill.) Tie Plant of the Chicago, Burlington & Quincy RailroadVol. II No. 2, 1915
Development of Demand for Wood Blocks: R. S. ManleyVol. II No. 2, 1915
The Port Reading Creosoting Plant of the Philadelphia & Reading and Central R.
R. of New Jersey
W. F. GoltraVol. II No. 3 & No. 4, 1915
Vol. III No. 1, 1916
Zinc Chloride as a Preservative: Alfred H. Clarke
The Preservative Treatment of Farm Timbers:
Geo. M. Hunt
Saving Creosote Oil in the Treatment of Piling: Clyde H. TeesdaleVol. II No. 4, 1915
The Central of Georgia Treating Plant. Vol. II No. 4, 1915
The Economic Use of Cross-Ties on the Baltimore & Ohio R. R
An Experimental Wood-Preserving Laboratory: W. G. MitchellVol. III No. 2, 1916
Decay: An Important Factor in Plant Management: Geo. M. Hunt
Treating Ties for the Grand Rapids & Ind., the Pere Marquette and Pennsylvania Lines
West

Wood-Preserving—(Concluded).
A Pacific Coast Timber-Treating Plant (Pacific Creosoting Co., Seattle, Wash.): H. E. HorrocksVol. III No. 3, 1916
The Relation Between the Specific Gravity of Zinc Chloride Solutions and Their Concentrations: E. BatemanVol. III No. 3, 1916
Experiments in Treating Ties in India: Ralph S. PearsonVol. III No. 3 & 4, 1916
Wood-Preserving Plants in the Vicinity of New YorkVol. III No. 4, 1916
Wood-Preserving Plant at Newark, N. J.: E. G. DraperVol. III No. 4, 1916
Wood-Preserving Plant at Maurer, N. J.: John C. WilliamsVol. III No. 4, 1916
Use of Fluorides in Wood Preservation. C. H. TeesdaleVol. III No. 4, 1916
Treated Wood in New York Bridges. Vol. III No. 4, 1916
Relation Between Toxicity and Volatility of Creosote Oils—I: E. BatemanVol. III. No. 4, 1916
Treatment of White-Oak TiesVol. III No. 3 & 4, 1916
An Experiment in the Preservative Treatment of Fence Posts—I: Morris GreenbergVol. III No. 4, 1916
-



Wood=Preserving

C. C. SCHNATTERBECK, Editor.

PUBLISHED QUARTERLY
UNDER THE DIRECTION OF THE EXECUTIVE COMMITTEE

American Wood-Preservers' Association

YOU MUST READ

Wood=Preserving

SHOULD YOU WISH

- To Promote the use of wood for all purposes to which it is adapted.
- To Encourage the preservative treatment of wood whereever decay is a factor in its service.
- To Keep posted on the development of materials and processes for effectively treating wood.
- To Learn more about the economical operation of woodpreserving plants.
- To Assist in the propaganda for the general conservation of our forest resources.


SUBSCRIPTION, \$1.00 A YEAR

(Free to Members of A. W-P. A.)

ADVERTISING RATES ON APPLICATION

Mt. Royal Station,

BALTIMORE, MD.




American Wood-Preservers' Association


APPLICATION FOR MEMBERSHIP

Date19	1
Full Name	
Street and No	
City and State	•••••
Occupation	··· -····
With	••••••••••
Membership Desired	••
Proposed by	

For objects of the Association and membership qualifications see Constitution in another part of this book.

•





·

RETURN TO the circulation desk of any University of California Library or to the

NORTHERN REGIONAL LIBRARY FACILITY Bldg. 400, Richmond Field Station University of California Richmond, CA 94804-4698

ALL BOOKS MAY BE RECALLED AFTER 7 DAYS

- 2-month loans may be renewed by calling (510) 642-6753
- 1-year loans may be recharged by bringing books to NRLF
- Renewals and recharges may be made 4 days prior to due date.

Mi

DUE AS STAMPED BELOW

UCI 27 1998	
12,000 (11/95)	
3Jan Joung	1
DEC 1 3 10	
	T.D.01 100 Fine



